




# H13Rx0 CR2032 coin-cell battery holder

Power


## Technical Specifications

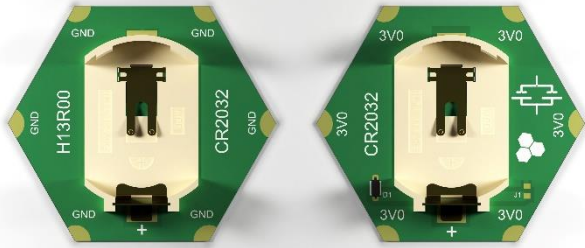

Bottom (1:1)

H13R00

Top (1:1)

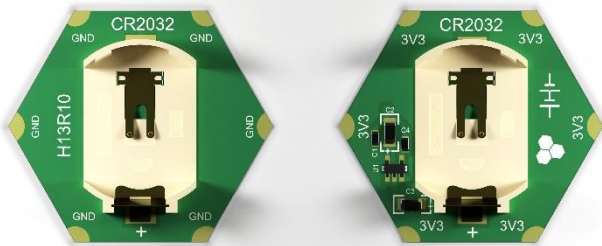

Bottom (1:1)

H13R10

Top (1:1)

- 2 x [CR2032](#) lithium coin-cell battery holders.
- Six power ports (+3.0V and GND for H13R00 and +3.3V and GND for H13R10).
- 2 x [BLP2032SM-GTR](#) SMD coin-cell holder with gold contacts.
- H13R00:
  - 2 x CR2032 in parallel (+3.0V output).
  - [BAT54JFILM](#) 40V 0.3A reverse current protection Schottky diode. (can be shorted with jumper)
- H13R10:
  - 2 x CR2032 in series (+3.3V output).
  - [TPS76433DBVT](#) 3.3V 0.15A LDO.

Available colors:

