

## High-power wireless module SV6202

### Description

SV6202 is an ultra-long-range wireless data transmission module, using high-performance Silicon Lab Si4432 RF chip. Low receiver sensitivity, coupled with industry-leading 2 W output power to ensure the large expansion of the scope and improve the link performance. Module provides a multi-band multi-channel and network ID to reduce interference during transmission to improve the transmission performance. Users can modify the software or online via PC serial port settings and the RF parameters.



### Feature

- 5000m RF line-in-sight distance@1.2kbps
- 433/470/868/915 MHz
- 40 channels
- 4 bytes net ID
- 2 bytes node ID
- Multiple air data rate
- GFSK modulation
- antenna match automatically and bi-direction switch control
- Support Serial port parameter setting
- Sensitivity: -121 dBm
- Max output power: 2 W
- Voltage: 4.5 ~ 6.5 V
- Temperature: -40 ~ +85 °C

### Application

- Remote telemetry
- Auto meter reading
- Security systems
- Data logger
- Wireless data communication
- Building residential automation and security
- Healthy monitoring
- Wireless PC peripherals
- Access Control System
- Robot control


## Electrical Specifications

Parameter	Min.	Typ.	Max.	Unit	Conditions
Operation conditions					
Supply Voltage	4.5	5.0	6.5	V	TTL
	4.5	5.0	5.5		232/485
Operating Temperature	-40	25	+85	°C	
Current consumption					
RX Current		25		mA	TTL
		34		mA	485
		32.7		mA	232
TX current		900		mA	@27dBm
Sleep Current		≤5		uA	
RF parameter					
Frequency	414.92	433.92	453.92	MHZ	@433MHZ
	470.92	470.92	509.92	MHZ	@470MHZ
	849.92	868.92	888.92	MHZ	@868MHZ
	895.92	914.92	934.92	MHZ	@915MHZ
Air data rate	1.2	9.6	38.4	Kbps	GFSK
Output power	13	/	+33	dBm	Setting by software
Sensitivity		-121		dBm	@1.2kbps

## Technical specification

### 5.1, Parameter configuration

In configuration mode, users can set the parameters by PC tool or in circuit through UART port. The parameters include channels, frequency, air data rate, out put power, serial port baud rate, data bit, stop bit, parity bit, NET ID and NODE ID. The detailed communication protocol is shown in the programming manual.

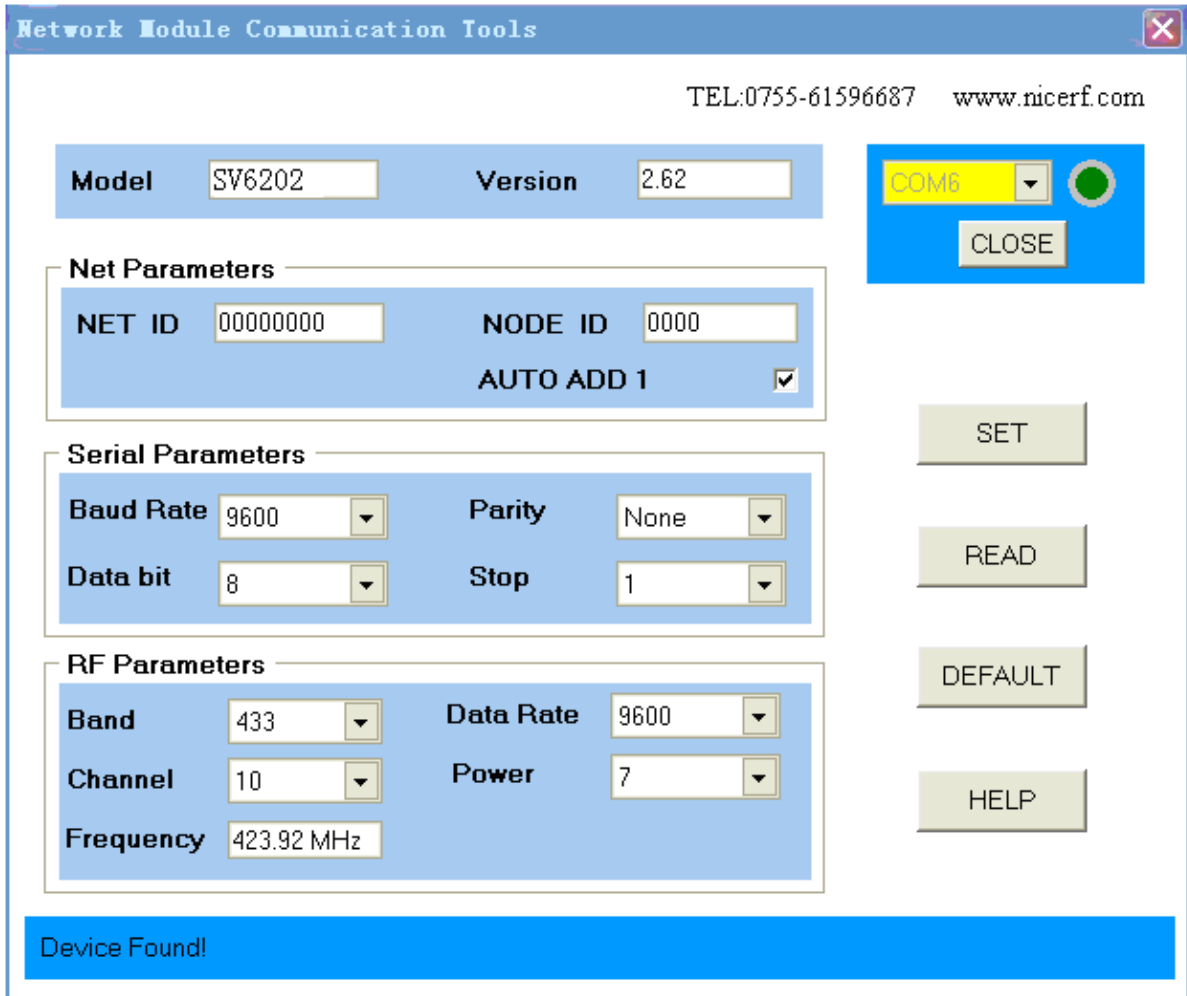
**Figure 1: Interface of setting tool**

Parameter	Length (byte)	Explanation
Frequency	1	433MHz / 470MHz / 868MHz / 915MHz
Channel	1	1 ~ 40
Air data rate	1	1200/2400/4800/9600/14400/19200/38400 bps
Output power level	1	0~7 level
UART baud rate	1	1200/2400/4800/9600/14400/19200/38400 bps
UART Data bit	1	7, 8, 9
UART stop bit	1	1, 2
UART parity	1	No、Odd、 Even

**Table 1: Parameter specification**

## 5.2, RSSI function (Optional)

Module has two versions. If users choose the version with RSSI function, the instruction will retrieve the module and receive a data packet of RSSI value in configuration mode.

## 5.3, Data transmitting

When module is in transmitting mode, data from serial port can be sent via RF chip modulation into the air toward targeted module of the link layer forwarding. When the targeted module receives the RF data from the source, it also converts it into a serial signal and output to the device of the target.

In order to ensure the stability and correctness of the data transmitting, user should pay attention to the following issues:

### 1) RX/TX Match

In the same network, in order to ensure available of communication, all modules must be in same condition. That means all the parameters such as frequency, channel, net ID are same. The module has a 4-byte network ID. It can not communicate with each other between the different network ID configuration modules. When the network ID is set to all 0, this module can receive any data information.

### 2) Latency

Since the wireless communication transmitting device receives from the terminal end of a certain amount of data, or wait a certain time before the new data does not start transmitting, the radio communication transmitting end to the receiving end there is a wireless communication delay, the other from the wireless communication terminal apparatus receiving end it will take some time, but the delay time under the same conditions is fixed (specific time is determined by serial rate, air rate determined by the size).

### 3) Data traffic

Inside the module has a 200-byte buffer, when the serial data rate less than or equal wireless transmission rate can be guaranteed data transfer smoothly, but if the serial port rate is greater than the wireless transmission rate, continuously sending data bytes exceeds the buffer size may data overflow occurs as a result of data loss. Therefore, large amounts of data for continuous transmission, to avoid data loss or errors, you can set the parameters so that the serial transmission rate does not exceed the

wireless transmission rate.

#### 5.4, Sleep mode

When CS pin is set to low, module is in sleep mode. User can't do any operation for the module.

The power consumption is low to 5uA.

#### Accessories

##### 1) Antenna

The antenna is an important part of the communication system. Its feature directly affects the performance of the communication system. The match impedance of module is 50 ohms, we recommend that users adopt standard spring antenna.




##### 2) USB Bridge Board


Modules needed by configuration tool to configure the relative parameters. The Company supplies a USB interface matching plate adapter with TTL/RS232/RS485 level, so that users can quickly and easily with the PC side communication.



**Schematic**

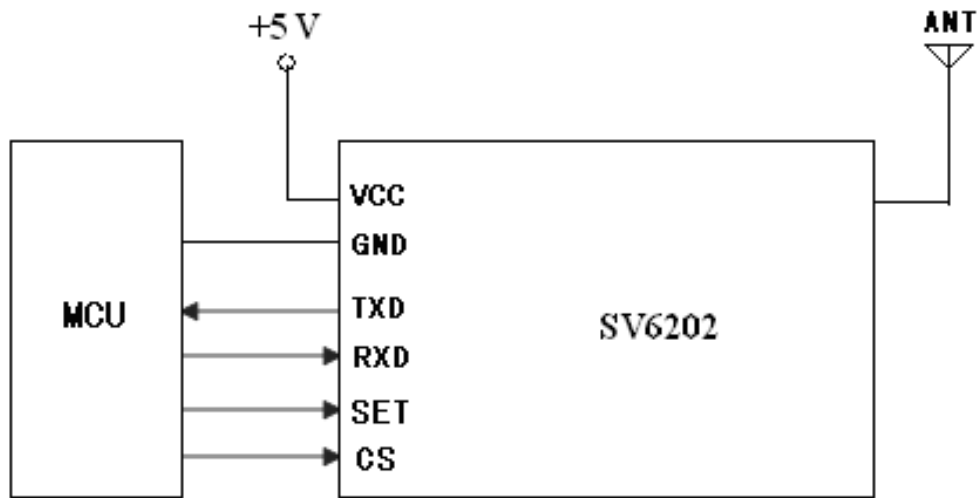


**Pinouts**

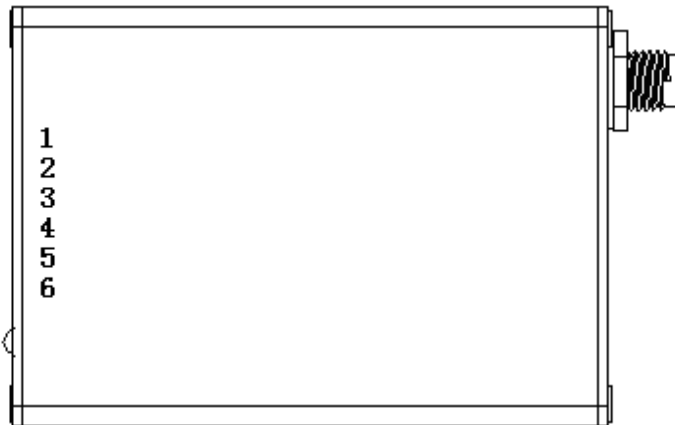

Pin No.	Definition	Description
1	VCC	Connected to the positive power supply (typical 5V)

2	GND	Connected to ground
3	TXD	Data transmitting
4	RXD	Data receiving
5	SET	Configuration parameters enable (low to enable the configuration parameters, the default high-level output)
6	CS	Enable (Low level sleep, the current is less than 5uA, High level default)

### Mechanical dimensions

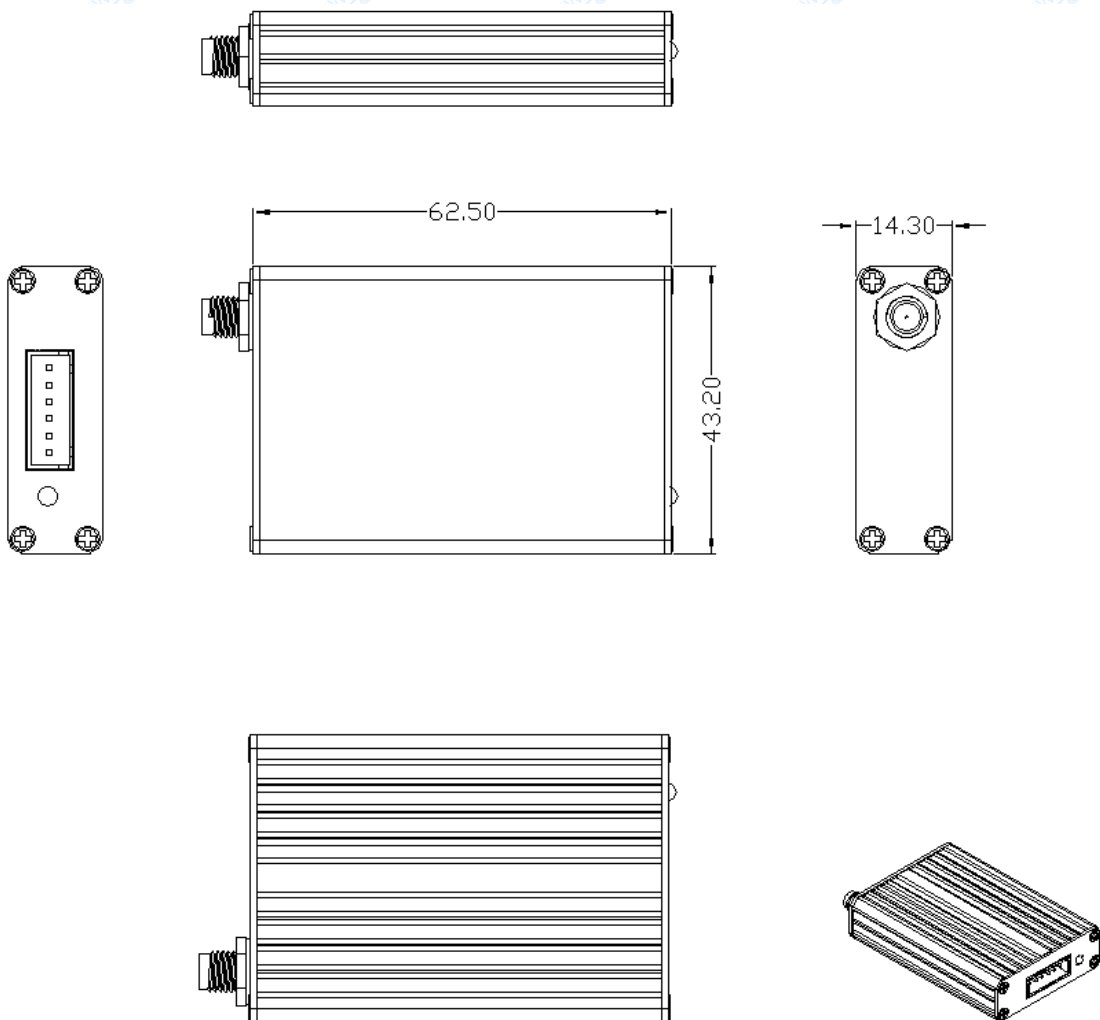

### Product Ordering Information

SV6202-433



---



---

Module Model                      Frequency

For example: If the customer needs 433MHZ band module that orders Model: SV6202-433

The SV6202 product following models:

Order a single Model	Product type
SV6202- 433	433MHZ, Chip module
SV6202- 470	470MHZ, Chip module
SV6202- 868	868MHZ, Chip module
SV6202- 915	915MHZ, Chip module

### Relative Q&A

- a) Why module can not communicate properly?
  - 1) Check the band, channel, rate, NET ID is set to the same;
  - 2) The power connection error, the module is not working;
  - 3) Module is enabled (CS high);
  - 4) The antenna connection is not correct;
  - 5) Module is damaged.
- b) Why far transmission distance?
  - 1) Power supply ripple is too large;
  - 2) The antenna types do not match, or not properly installed;
  - 3) The surrounding environment is harsh, strong interference sources;
  - 4) Surrounding co-channel interference;
- c) Why is receiving data correctly?
  - 1) Improper parameter settings;
  - 2) Module data interface is bad.