



qBox DIY IOT Enclosure Kits

User Manual

Abstract

User Manual describing the qBox DIY IOT Enclosure Kits. Kits features, content and project ideas provided.

IBT-QBX-BAS-X-UM

www.iot-bots.com



Table of Contents

Revision History	2
Overview.....	3
Features.....	3
Description	3
qBox Enclosure Kit (No SMA)	4
qBox Enclosure Kit (One SMA)	5
qBox Enclosure Kit (Two SMAs).....	6
qBox Enclosure Kit parts	7
Specification	12
qBox Enclosure Kit content	13
Project ideas	13
Abbreviations.....	14
Trademark notice.....	14
Ordering info	15

Revision History

No	Version	Date	Author	Description
1	1.0	05.12.2020	lot-bots	Initial
2				
3				

Overview

Perfect for any DIY IOT project, qBox Enclosure Kit series is the part of the newest HW platform designed to help hobbyists, makers and all DIYers to build environmental ready IOT solutions.

Features


- Flanged IP65 waterproof enclosure: Sealed, made of high-quality ABS material suitable for indoor and outdoor DIY IOT projects;
- Incorporated PG7 cable glands: Two cable inputs securely allow bringing the power in and connecting sensors and actuators;
- Perfect fit PCB: High-quality double-sided PCB with 0.1" hole spacing for DIP integrated circuits, modules, and main controller board;
- Fixed placement for controller board: Well-designed PCB allows to carry a variety of MCU boards like Adafruit Feather Compatible, Arduino MKR Compatible, NodeMCU, etc;
- Built in SMA connectors: Up to two SMA Straight Female to IPEX (U.FL) adapter cables give external antennas connections to your wireless board;
- Dedicated Connectors positions: Terminal blocks, Grove and 0.1" DIP power and interface connectors could be easily soldered onto the PCB;
- Arduino UNO compatible board carrier capability: Arduino UNO compatible board could be mounted at the top of PCB with fasteners kit included.

Description


Each qBox Enclosure Kit consists of durable waterproof IP65 enclosure with installed PG7 glands, double sided PCB with dedicated placements for IOT controller and connectors and integrated SMA to u.FL adapter cable (up to two, depending on kit model).

qBox Enclosure Kit (No SMA)

qBox Enclosure Kit (No SMA) is the simplest member in qBox Enclosure Kit family. It has no integrated SMA to u.FL adapter cable, but still able to keep wireless connectivity device with internal antennas.

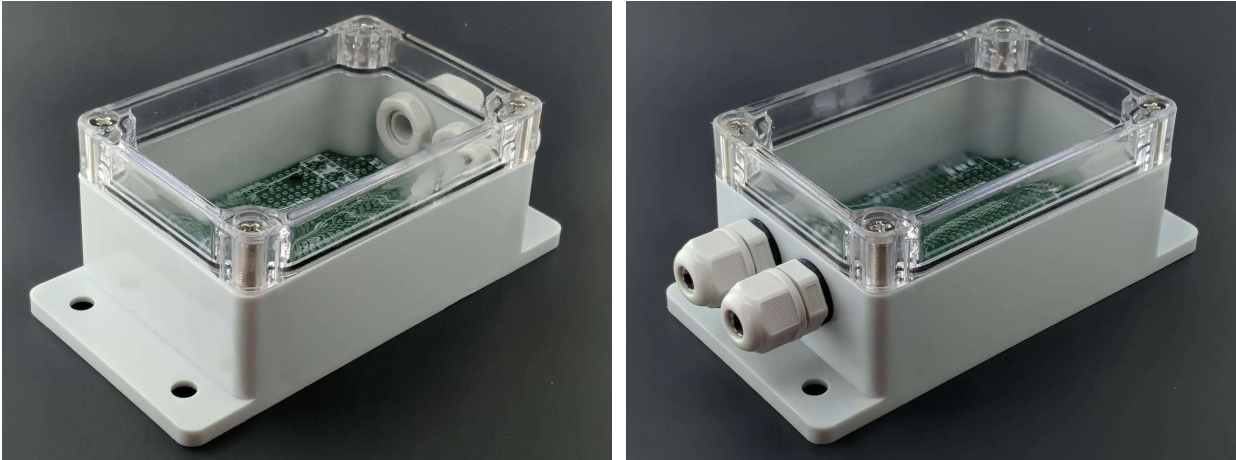


Pic.1. qBox Enclosure Kit (No SMA) common view

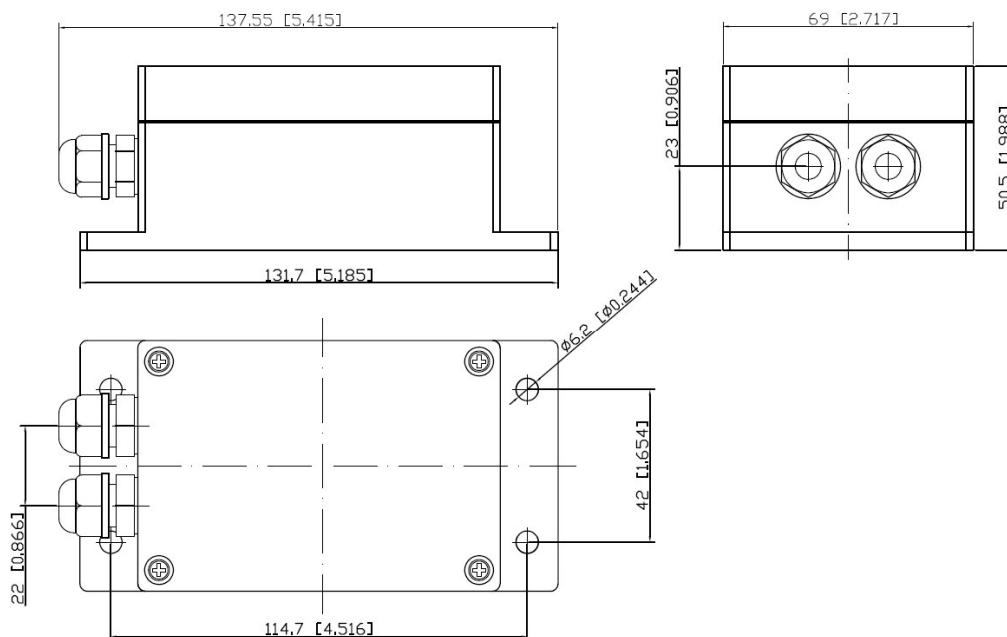


Pic. 2. qBox Enclosure Kit (No SMA) dimensions

qBox Enclosure Kit (One SMA)

qBox Enclosure Kit (One SMA) is the member of qBox Enclosure Kit family which is able to bring up to one external antenna signal to IOT device located inside. It has one integrated SMA to u.FL adapter cable.

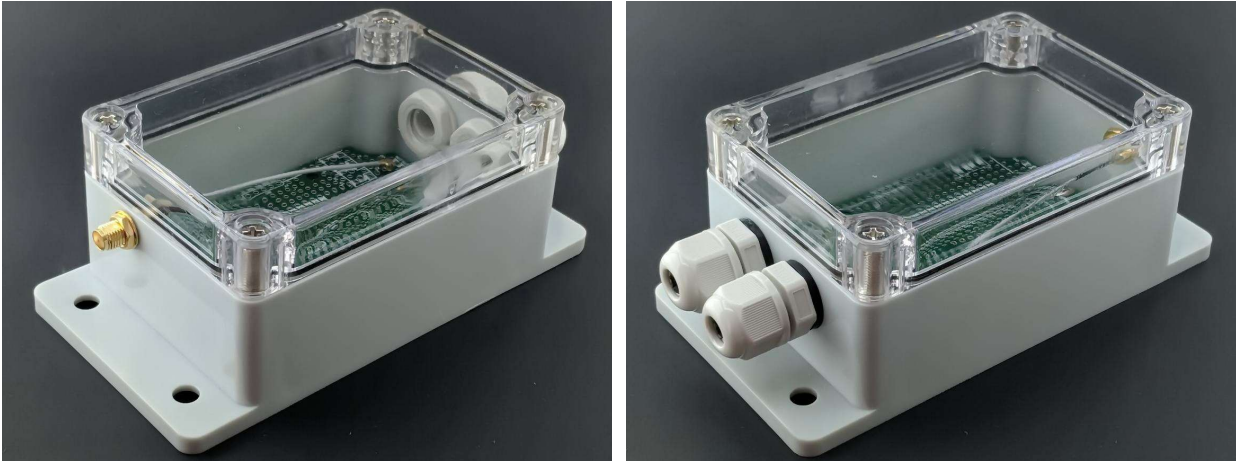


Pic.3. qBox Enclosure Kit (One SMA) common view

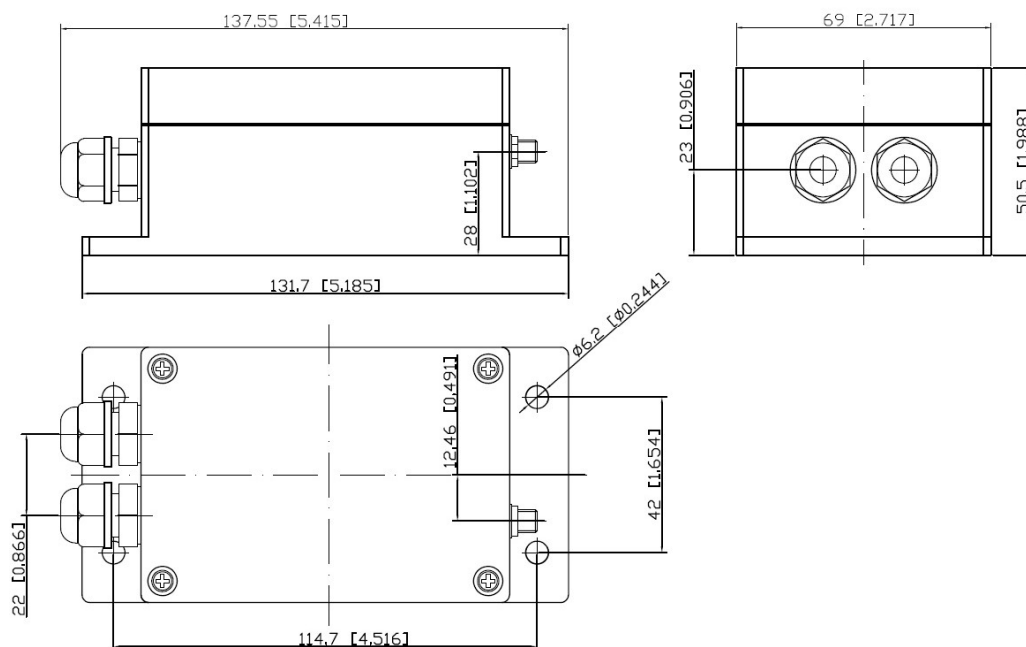


Pic. 4. qBox Enclosure Kit (One SMA) dimensions

qBox Enclosure Kit (Two SMAs)

qBox Enclosure Kit (Two SMA) is the most charged member of qBox Enclosure Kit family which has got two integrated SMA to u.FL adapter cables.

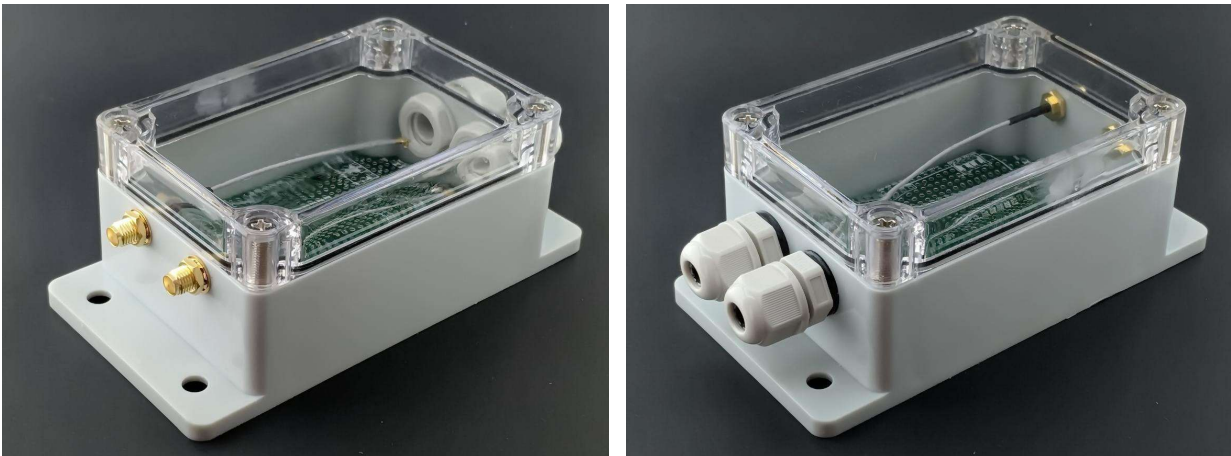


Pic.5. qBox Enclosure Kit (Two SMAs) common view

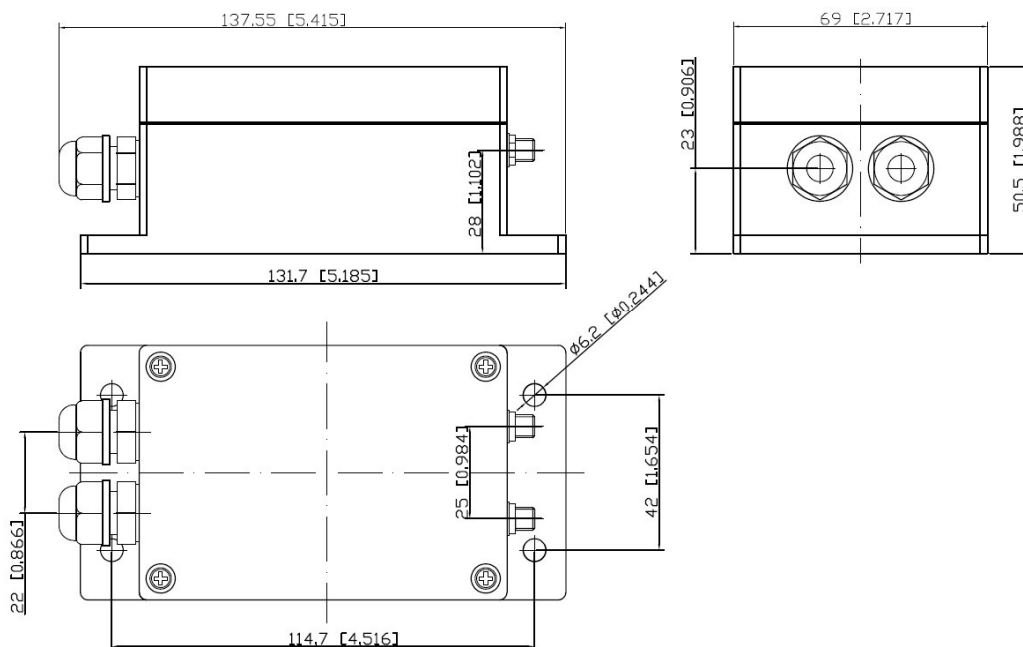

Pic. 6. qBox Enclosure Kit (Two SMAs) dimensions

qBox Enclosure Kit parts

Each qBox Enclosure Kit has got several parts built in.

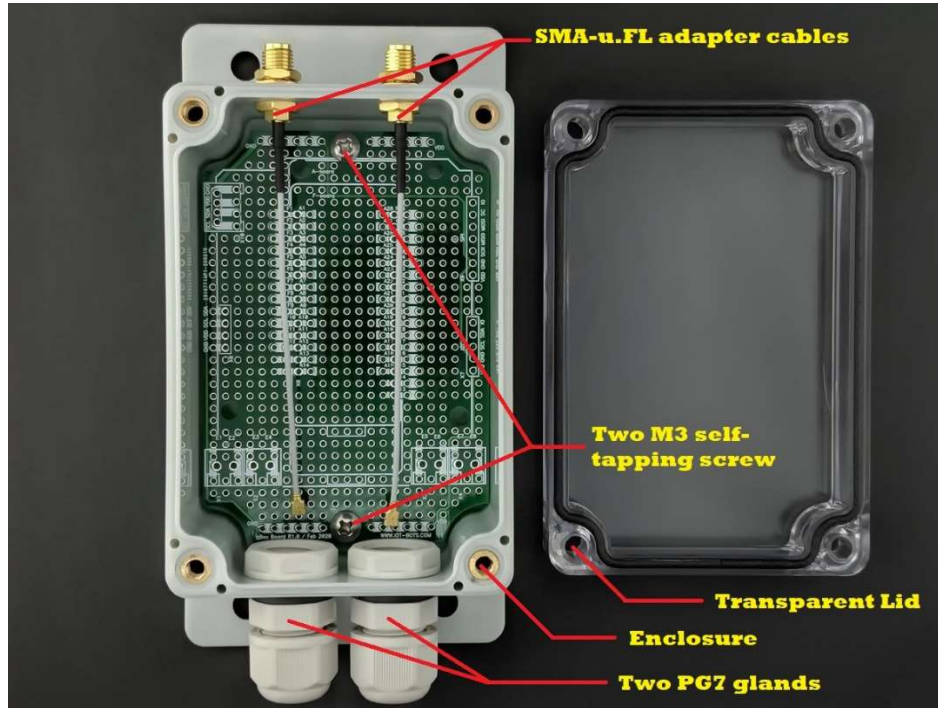

Pic.7. qBox Enclosure Kit parts

External DC voltage from power adapter or solar system could be brought by cable through the one gland inner and another gland gives opportunity to connect external sensors or actuators.

Up to two (depending on kit type) GSM / LTE / WiFi / LoRa / etc. external antennas could be connected to wireless board u.FL PCB connector via SMA to IPEX (u.FL) adapter cables glued into enclosure wall.

Two M3 self-tapping screws securely attach the PCB to the enclosure. Same time board could be easily removed.

Enclosure has enough room to keep with or without stacking header one IOT controller board like Adafruit Feather Compatible (AFC) or Arduino MKR Compatible (AMC) or another IOT board, power supply (DC/DC), OLED display and sensor modules using plain grid proto holes.



Pic.8. qBox Enclosure Kit with Arduino
MKR Compatible (AMC) board installed



Pic.9. qBox Enclosure Kit with Adafruit
Feather Compatible (AFC) board
installed

Up to four pluggable 3,5mm terminal blocks, one Grove and several DIP 0.1" I2C and SPI interface connectors could be populated. Two separate power traces for VDD and GND along short PCB sides allow bring the power to sensor boards.




Pic.10. qBox Enclosure Kit PCB common view (Front and Back)


Each connector pin has got a trace with DIP contacts that wires from other modules could be easily soldering.

There is example of connectors proposal:


- X1: External power connection through pluggable 3,5mm terminal block;
- X2...X4: External Input / Output sensor / actuator connections through pluggable 3,5mm terminal blocks;
- X5, X6: IOT board connectors could be located (0,1" DIP);
- X7: I2C sensors connector placement (0,1" DIP) with pins: VDD, GND, SCL, SDA, IO;
- X8: OLED I2C connector placement (0,1" DIP) with pins: VDD, GND, SCL, SDA;
- X9: SPI sensors connector placement (0,1" DIP) with pins: VDD, GND, SCK, MISO, MOSI, CS, IO;
- X10: "Grove" I2C connector placement (2,0 mm DIP) with pins: VDD, GND, SCL, SDA.

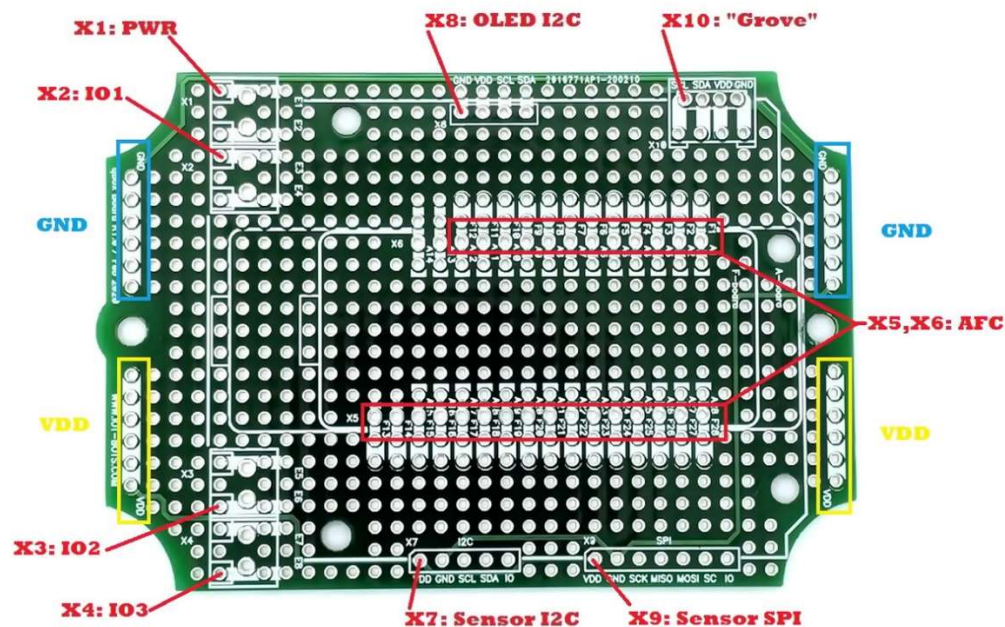


Pic.10. Connectors placement proposal: Adafruit Feather Compatible board based

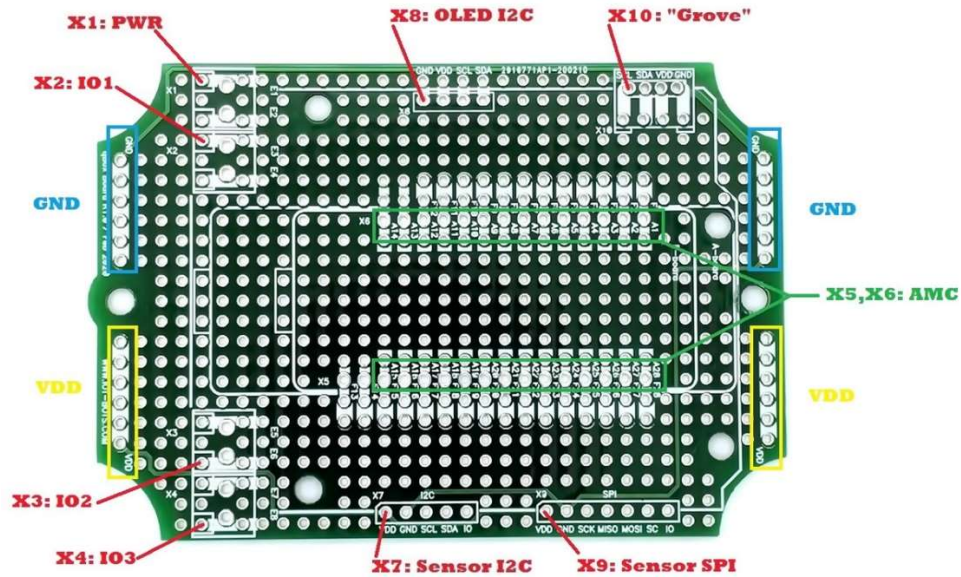

Pic.11. Connectors placement proposal: Arduino MKR Compatible board based

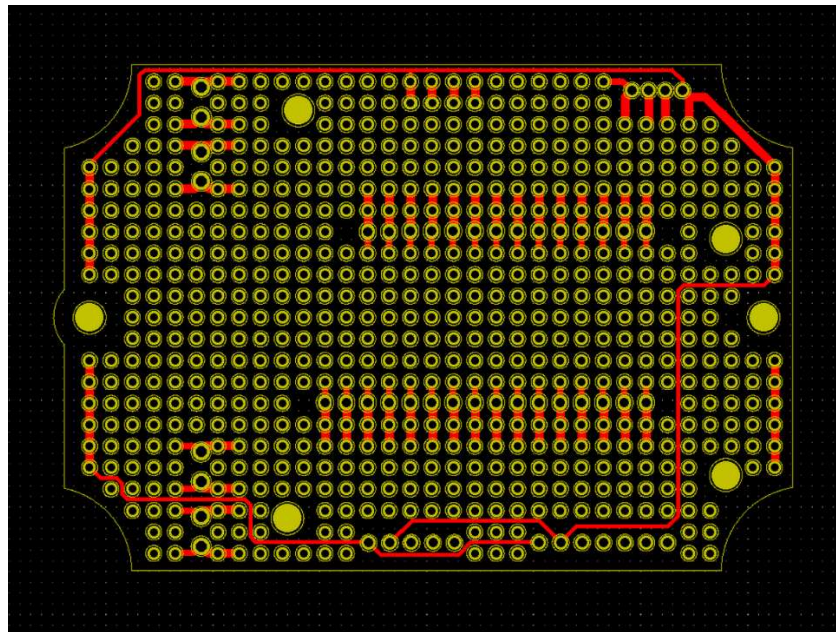


Pic.12. PCB Front Copper traces

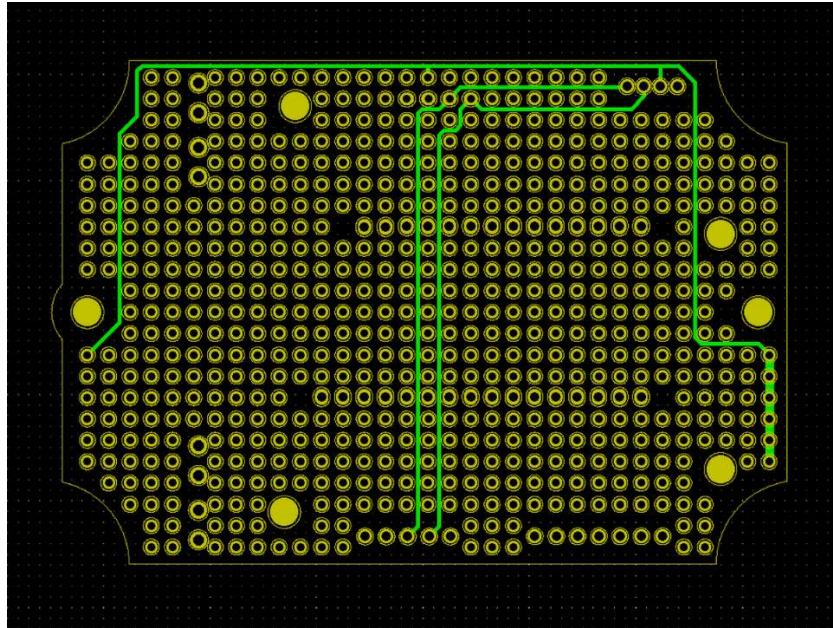


Pic.12. PCB Back Copper traces

IOT board connector pins have conditional names: A1...A28 for AMC boards, F1...F28 for AFC board.

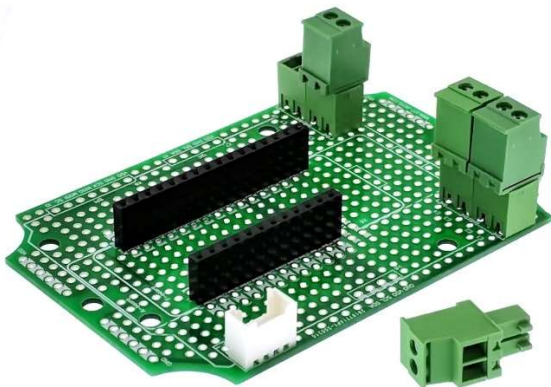


Pic.13. qBox Enclosure Kit PCB with connectors setup for Adafruit Feather Compatible board

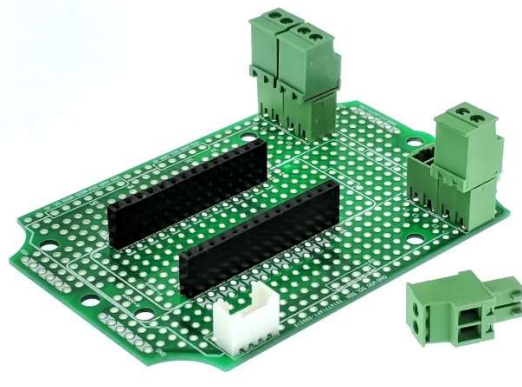

Pic.14. qBox Enclosure Kit PCB with connectors setup for Arduino MKR Compatible board

Four additional holes and fasteners kit allow to mount Arduino Uno compatible board at the top of PCB.

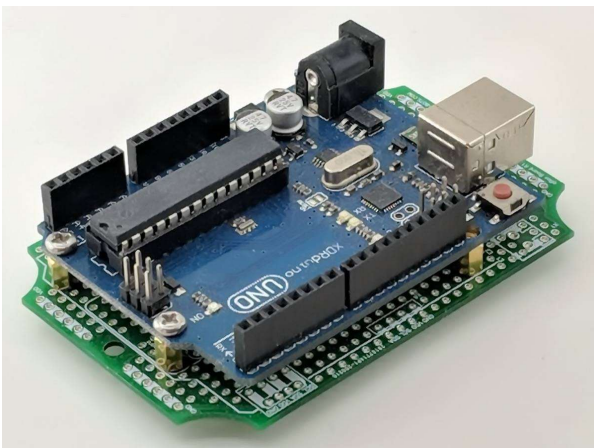


Pic.15. qBox Enclosure Kit PCB with connectors setup for Adafruit Feather Compatible board



Pic.16. qBox Enclosure Kit PCB with connectors setup for Arduino MKR Compatible board

Transparent lid allows to see internal parts, electronics, LEDs and even display and is able to hold LiPol battery or battery holder to be applied to the internal surface.

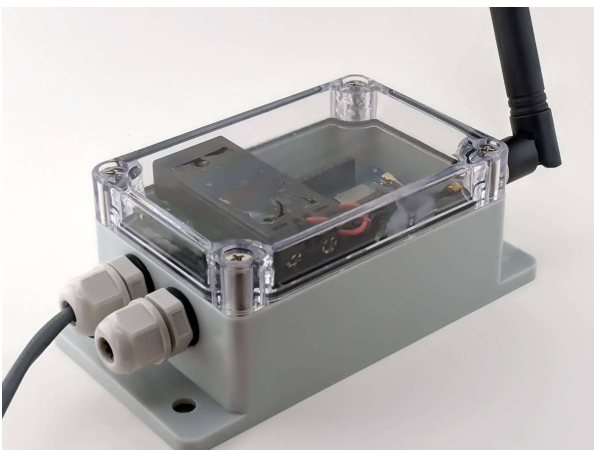

Pic. 17. 2xAAA battery holder applied to a transparent lid (assembled view)



Pic. 18. 2xAAA battery holder applied to a transparent lid (inside view)

Specification

Housing Material: ABS

Water and Dust Proof: IP65

Enclosure Outer Size: 5.42"x2.72"x1.99" (L*W*H)

Enclosure Inner Size: 3.69"x2.42"x1.7" (L*W*H)

Gland model: PG7

Cables with diameters: 0.12-0.25"

PCB size: 3.46"x2.36"

Arduino UNO Compatible board fasteners kit:

- M3 brass hex standoff: 4 pcs
- M3 Stainless Steel Screw: 4 pcs
- M3 Stainless Steel Nuts: 4 pcs

qBox Enclosure Kit content

- IP65 waterproof enclosure with two PG7 glands installed and up to two SMA u.FL adapter cables glued (depending on kit type);
- High quality prototyping double sided PCB mounted with two M3 self-tapping screws (**No connectors included**);
- Arduino UNO Compatible board fasteners kit;
- packaging bag and shipping box.

Project ideas

Using qBox Enclosure Kits the variety of IOT DIY and POC projects could be done, like LoRa-based soil moisture monitoring project, home WiFi garage door opener, NB-IOT beehive monitoring system, GSM GPS asset tracking solution and many others.



Pic. 19. Arduino MKR LoRa controller



Pic. 20. WiFi ESP8266 No SMA project



Pic. 21. LTE GPS BG96 tracker with RS485 port



Pic. 22. Beehive LoRa monitoring system

Abbreviations

No№	Abbreviation	Explanation
1	AFC	Adafruit Feather Compatible
2	AMC	Arduino MKR Compatible

Trademark notice

All referenced brands, product names, service names, and trademarks are the property of their respective owners.

Ordering info

No	Item	SKU
1	qBox DIY IOT Enclosure Kit (No SMA)	IBT-QBX-BAS-0
2	qBox DIY IOT Enclosure Kit (One SMA)	IBT-QBX-BAS-1
3	qBox DIY IOT Enclosure Kit (Two SMAs)	IBT-QBX-BAS-2