


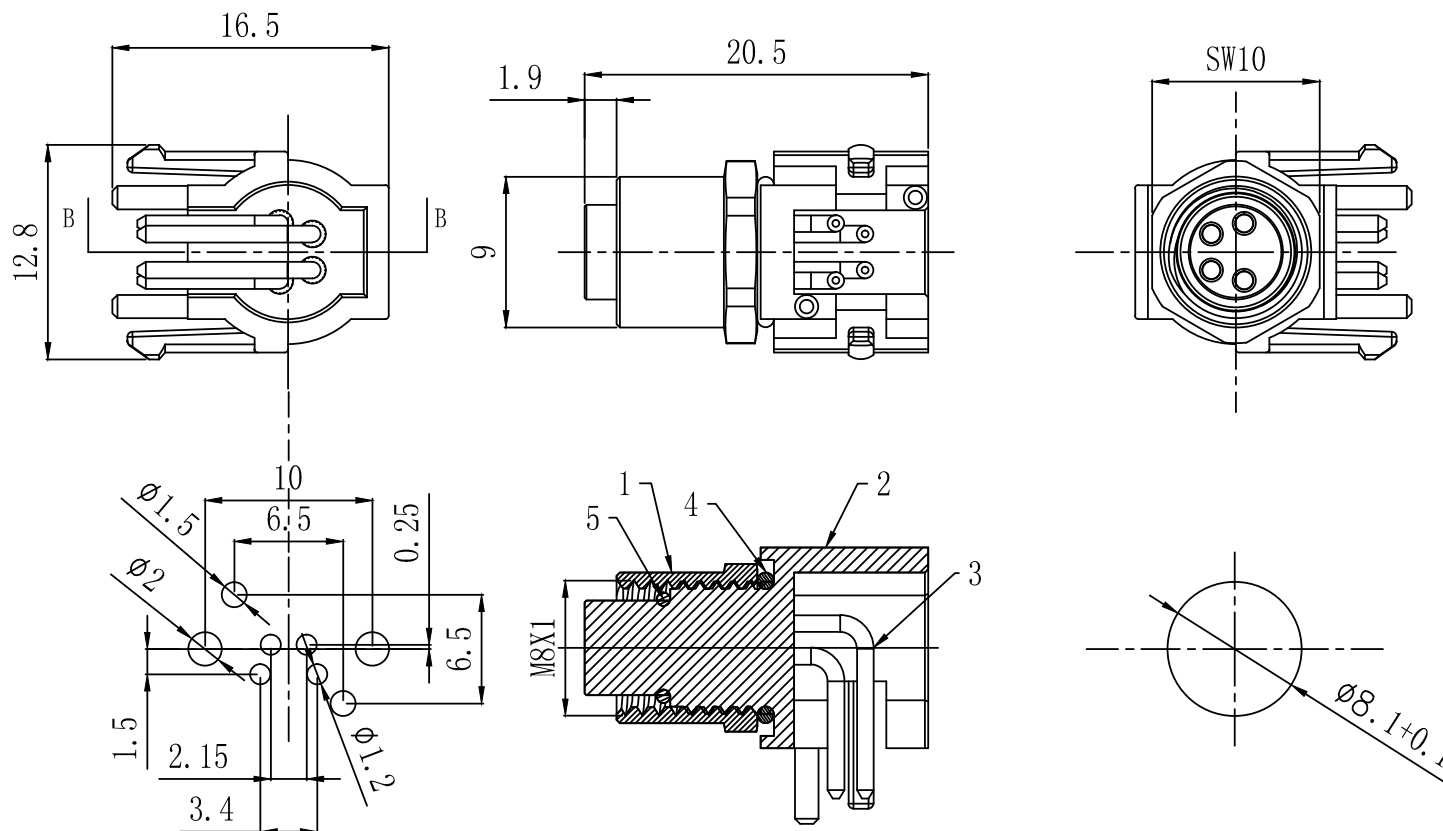

Section B-B

- 5.Sealing Ring(O-Ring): NBR
 4.Sealing Ring(O-Ring): NBR
 3.Hole: QSn4-3
 2.Insulator: PA
 1.Screw Nut: Brass

Technical

Rated Impulse Voltage: 800v
 Rated Voltage: 30v
 Rollution Degree: 3
 Overvoltage Category: II
 Material Group: II
 Rated Current: 4A
 Volume Resistivity: <3mΩ
 Degree Of Protection: IP67
 Operating Temperature: -40°C ~ 85°C
 Housing: Brass Nickel Plated
 Contact Finish: Au (Gold)

ASSEMBLY DRAWING		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Logan Luo	TITLE: M8 Female PCB Mount Angled		
SIZE	UNITS	X±0.25	X°±3.0°	CHECKED BY: Otto Chen	PART NO.:		
A4	MM[INCH]	.X±0.20	.X°±2.0°		YKM8-PTB0204A		
SCALE	REV.	.XX±0.10	.XX°±1.5°	DESIGND BY:	Web.:	SHEET	
1:1	A3	.XXX±0.05	.XXX°±1.0°	David Xiao	www.ingketech.com		