

LoRa-E5

LoRa Wireless Module - Powered by STM32WE5

Datasheet

V1.0

Content

Content	2
1 Introduction	- 3 -
1.1 Feature	3
2 Description.....	5
2.1 Pin definition.....	5
3 Electrical characteristics	6
3.1 Extreme working conditions	6
3.2 Normal working conditions.....	7
3.3 Module specifications	7
4 Typical RF performance test	8
4.1 LoRa-E5-LF Performance Testing	8
4.2 LoRa-E5-HF Performance Testing.....	11
5 Application information	14
5.1 Package information.....	14
5.2 External interface of the module.....	15
5.3 Reference design based on LoRa-E5 module	15
6 LoRaWAN® application information.....	16
6.1 LoRaWAN® application	16
6.2 Design LoRaWAN® wireless sensor based on LoRa-E5.....	16
7 Ordering information.....	17
8 Reversion.....	17

1 Introduction

LoRa-E5 is a low-cost, ultra-low power, ultra-small size LoRaWAN[®] module designed by Seeed Technology Co., Ltd. The module uses ST system-level package chip STM32WLE5JC, embedded high-performance LoRa[®] chip SX126X and ultra-low power Consumption of MCU. The target application of this module is wireless sensor networks and other Internet of Things devices, especially battery-powered low power consumption and long-distance occasions.

This specification mainly describes the hardware information, hardware performance and application information of the module.

LoRa-E5 LoRaWAN[®] module is mainly suitable for long-distance, ultra-low-power applications such as wireless meter reading, sensor networks, and other low-power wide-area IoT scenarios.

1.1 Feature

- Low power consumption: as low as 2.1uA sleep current (WOR mode)
- low cost:
- Small size: 12mm X 12mm * 2.5mm 28 pins SMT
- High performance:
 - ✓ LoRa-E5-LF
 - ✓ TXOP=10dBm@434MHz
 - ✓ TXOP=22dBm@470MHz
 - ✓ LoRa-E5-HF:
 - ✓ TXOP=22dBm@868/915MHz
 - ✓ -136.5dBm sensitivity for SF12 with 125KHz BW
- 158dB link budget, suitable for long distance
- interface
 - ✓ USART
 - ✓ I2C
 - ✓ ADC
 - ✓ SWD
- Embedded LoRaWAN[®] protocol, AT command, support global LoRaWAN[®] frequency plan
 - ✓ EU868
 - ✓ US915 and US915 Hybrid
 - ✓ CN779
 - ✓ AU915
 - ✓ CN470 and CN470 Prequel
 - ✓ AS923
 - ✓ KR920
 - ✓ IN865

This product specification includes a detailed description of the LoRa-E5 module's performance and functions. For the latest firmware, product updates or errata, please contact Seeedstudio.

2 Description

LoRa-E5 is embedded with high-performance STM32WLE5JC, which is very suitable for the design of various IoT nodes.

Based on the development of the multi-mode high-performance SX126X chip, the LoRa-E5 module supports (G) FSK mode and LoRa®. 62.5kHz, 125kHz, 250kHz and 500kHz bandwidth can be used in LoRa® mode.

Based on the powerful functions and rich peripherals of STM32WLE5JC, the module provides UART, I2C, SPI, ADC and GPIOs for users to choose according to the application. If you need to upgrade the built-in AT command firmware, please use the two-wire interface (UART) to complete the programming based on the boot mode; and customers can develop the software based on the internal MCU of the module to complete the program erasure and programming through SWD.

LoRa-E5 currently contains two sub-models, LoRa-E5-LF (Single-core STM32WLE5JC + SX126X) and LoRa-E5-HF (Single-core STM32WLE5JC + SX126X), LoRa-E5-LF supports 22dBm @ LF band (470MHz); 10dBm @ LF band (434MHz); LoRa-E5-HF supports 22dBm @ HF band (868 / 915MHz).

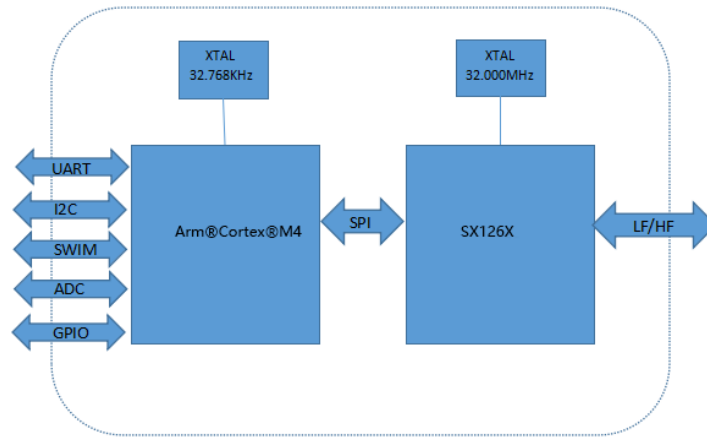


Figure 1 LoRa-E5 Schematic diagram

2.1 Pin definition

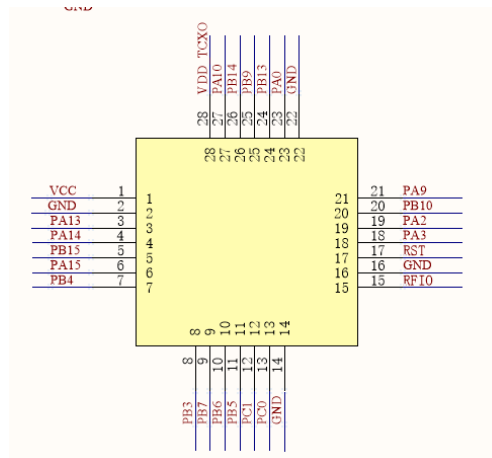


Figure 2 LoRa-E5 Pin arrangement

Table 1 LoRa-E5 pinout

Number	Name	Type	Description
1	VCC	-	Supply voltage for the module
2	GND	-	Ground
3	PA13	I	SWDIO of SWIM for program download
4	PA14	I/O	SWCLK of SWIM for program download
5	PB15	I/O	SCL of I2C2 from MCU
6	PA15	I/O	SDA of I2C2 from MCU
7	PB4	I/O	MCU GPIO
8	PB3	I/O	MCU GPIO
9	PB7	I/O	UART1_RX from MCU
10	PB6	I/O	UART1_TX from MCU
11	PB5	I/O	MCU GPIO
12	PC1	I/O	MCU GPIO ; LPUART1_TX from MCU
13	PC0	I/O	MCU GPIO ; LPUART1_RX from MCU
14	GND	-	Ground
15	RFIO	I/O	RF input/output
16	GND	-	Ground
17	RST	I/O	Reset trigger input for MCU
18	PA3	I/O	MCU GPIO; USART2_RX from MCU
19	PA2	I/O	MCU GPIO; USART2_TX from MCU
20	PB10	I/O	MCU GPIO
21	PA9	I/O	MCU GPIO
22	GND	-	Ground
23	PA0	I/O	MCU GPIO
24	PB13	I/O	SPI2_SCK from MCU; Boot pin(Active low)
25	PB9	I/O	SPI2_NSS from MCU
26	PB14	I/O	SPI2_MISO from MCU
27	PA10	I/O	SPI2_MOSI from MCU
28	PB0	I/O	Unavailable; Suspended treatment

3 Electrical characteristics

3.1 Extreme working conditions

Reaching or exceeding the maximum ratings listed in the table below can cause equipment damage.

Table 2 Absolute Maximum Ratings

Item	Description	min	max	unit
VCCmr	Supply voltage	-0.3	+3.9	V
Tmr	Ambient temperature	-40	+85	°C
Pmr	RF input power	-	+10	dBm

3.2 Normal working conditions

Table 3 Recommended Operating Conditions

Item	Description	min	max	unit
VCCop	Supply voltage	+1.8	+3.6	V
Top	Ambient temperature	-40	+85	°C
Pop	RF input power	-	+10	dBm

3.3 Module specifications

Table 4 LoRa-E5 features

ITEMs	Parameter	Specifications			Unit
Structure	Size	12(W) X 12(L) X 2.5(H)			mm
	Package	28 pins, SMT			
Electrical Characteristics	power supply	3.3V type			V
	Sleep current	2.1uA (WDT on);			uA
	Operation current (Transmitter+MCU)	50mA @10dBm in 434MHz type			mA
		111mA @22dBm in 470MHz type			
		111mA @22dBm in 868MHz type			
	Operation current (Receiver+MCU)	6.7mA @BW125kHz, 434MHz type			mA
		6.7mA @BW125kHz, 470MHz type			
		6.7mA @BW125kHz, 868MHz type			
	Output power	10dBm max @434MHz			dBm
		22dBm max @470MHz			
		22dBm max @868MHz			
	Sensitivity	@SF12, BW125kHz			
Fr(MHz)		min	type	max	
434		-	-134.5	-136	
470		-	-136.5	-137.5	
Harmonics	<-36dBm below 1GHz			dBm	
	<-40dBm above 1GHz			dBm	
	RFIO	RF port			

Interface	UART	3 group of UART, include 2pins	
	I2C	1 group of I2C, include 2 pins	
	ADC	1 ADC Input, include 1pins,12-bit 1Msps	
	NRST	Manual reset pin input	
	SPI	1 group of SPI, include 4 pins	

4 Typical RF performance test

4.1 LoRa-E5-LF Performance Testing

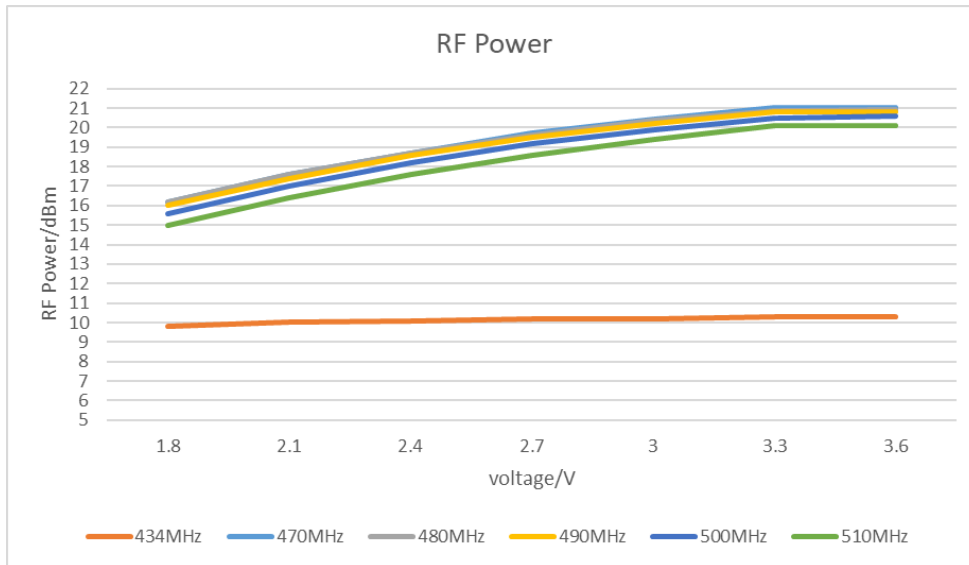


Figure 3 RF Power vs Voltage (434~510MHz)

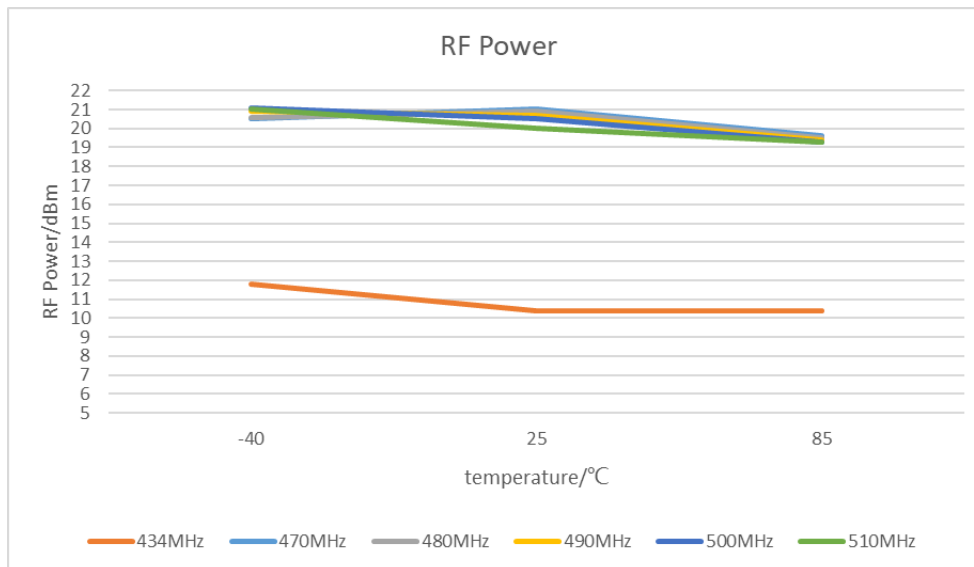


Figure 4 RF Power VS Temperature (434~510MHz)

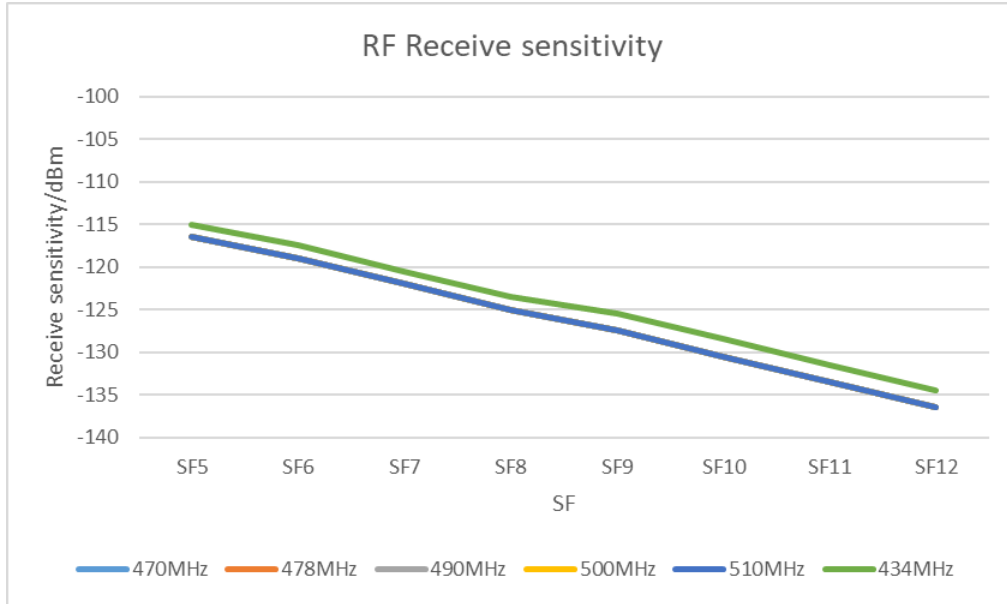


Figure 5 RF Receiver Sensitivity vs Spreading factor (434~510MHz)

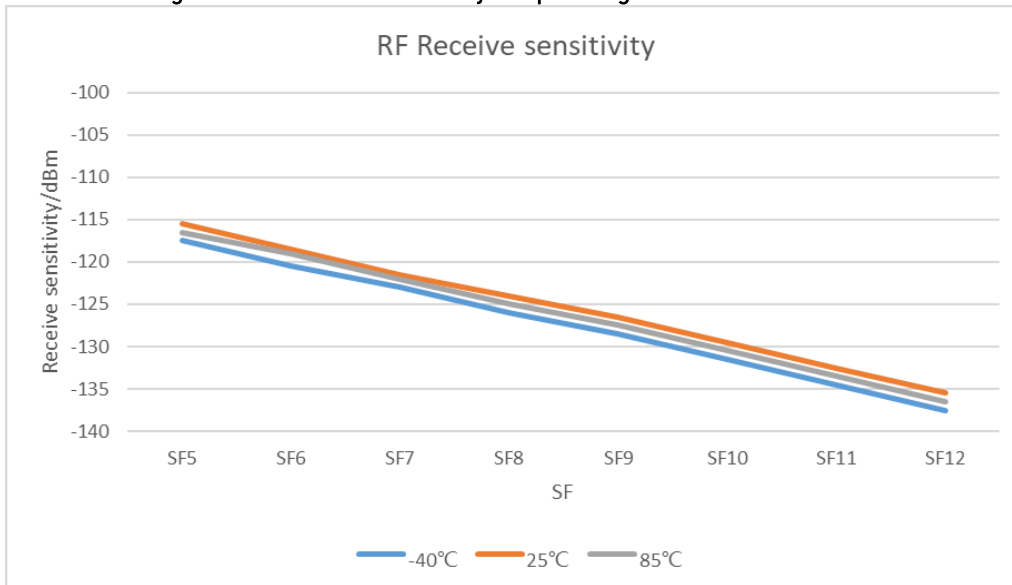


Figure 6 RF Receiver Sensitivity VS Temperature (470MHz)

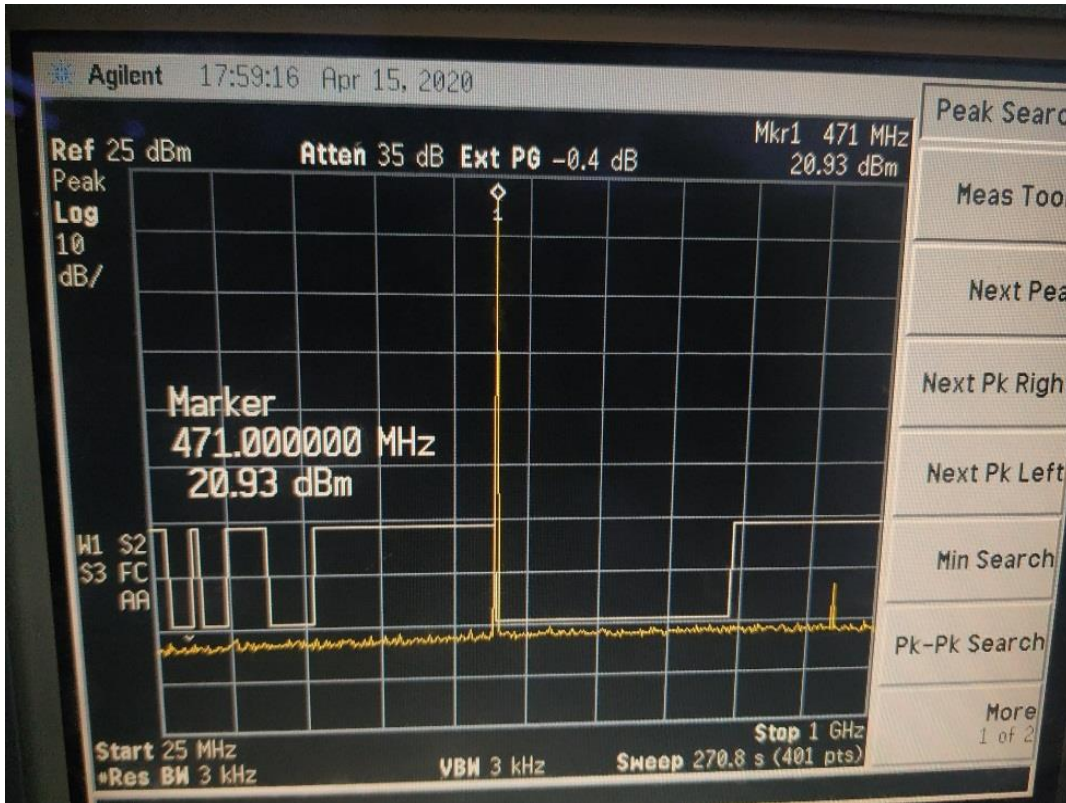


Figure 7 Harmonic(25MHz~1GHz)@Frf=470MHz, TXOP=22dBm

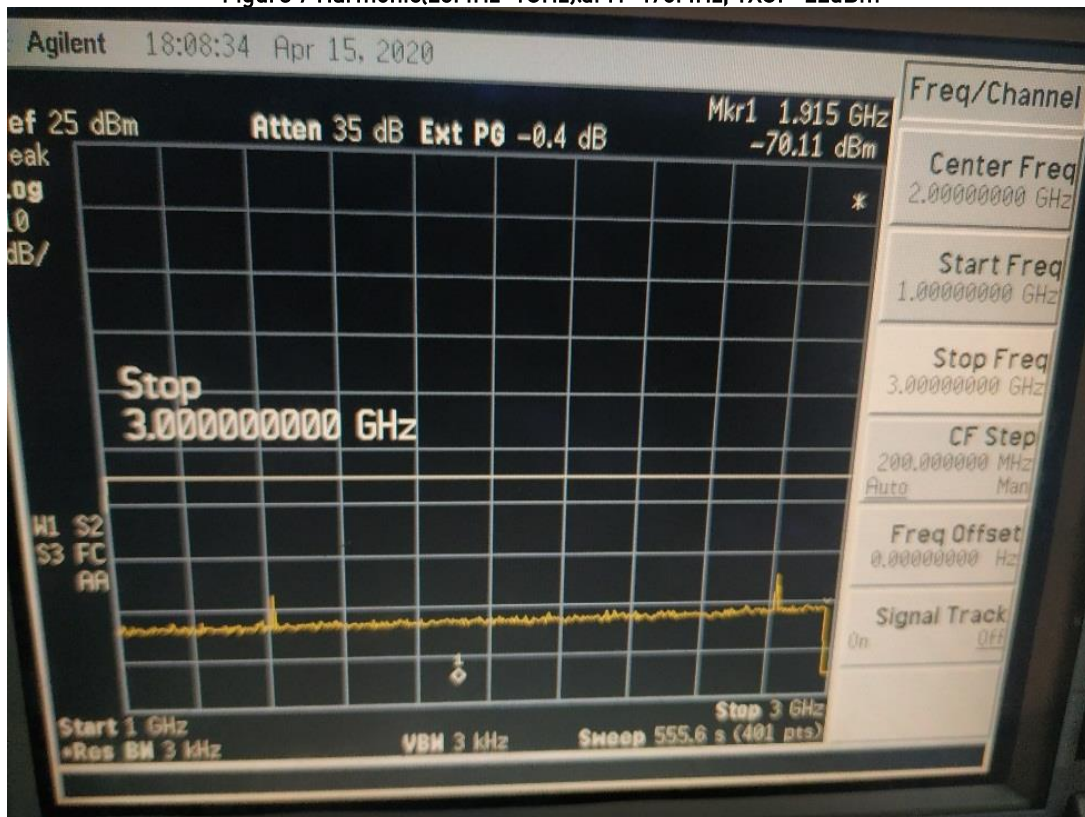


Figure 8 Harmonic(1GHz~3GHz)@Frf=470MHz, TXOP=22dBm

4.2 LoRa-E5-HF Performance Testing

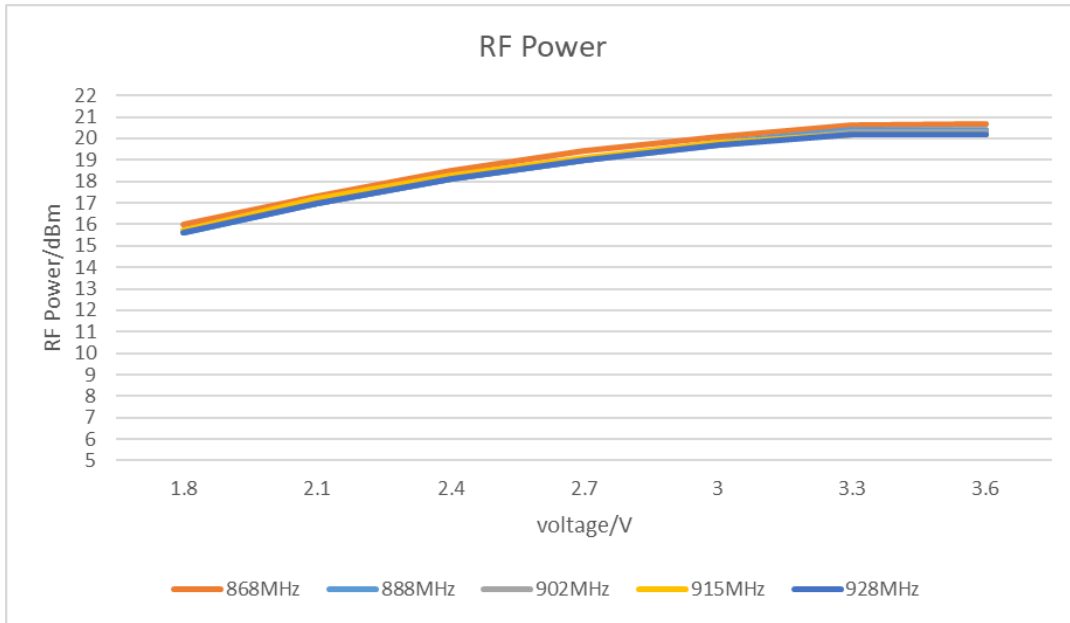


Figure 9 RF Power vs Voltage (868~928MHz)

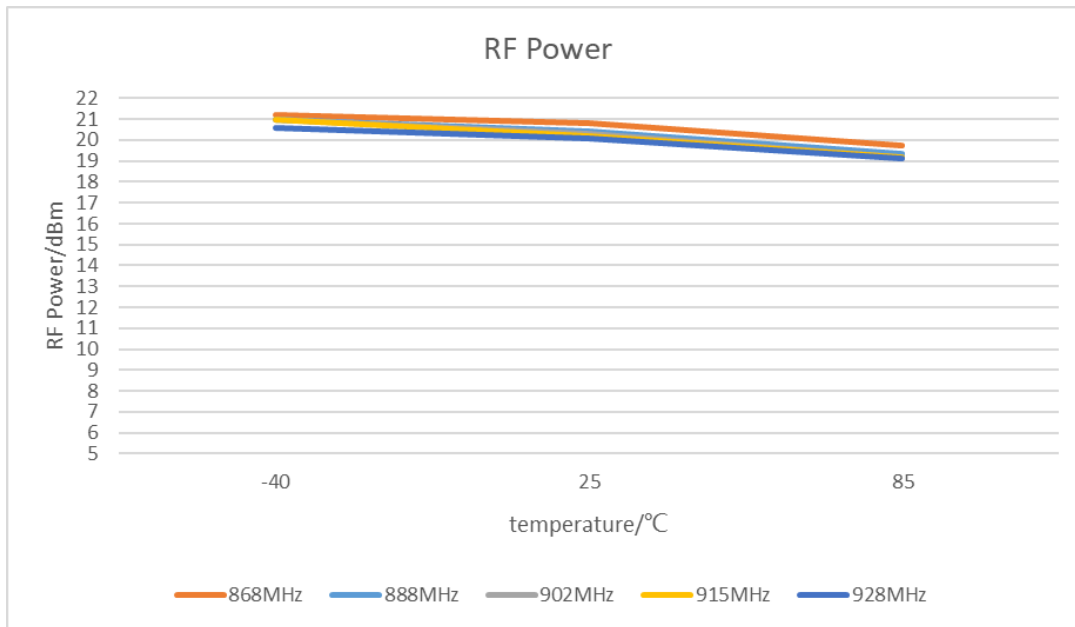


Figure 10 RF Power VS Temperature (868~928MHz)

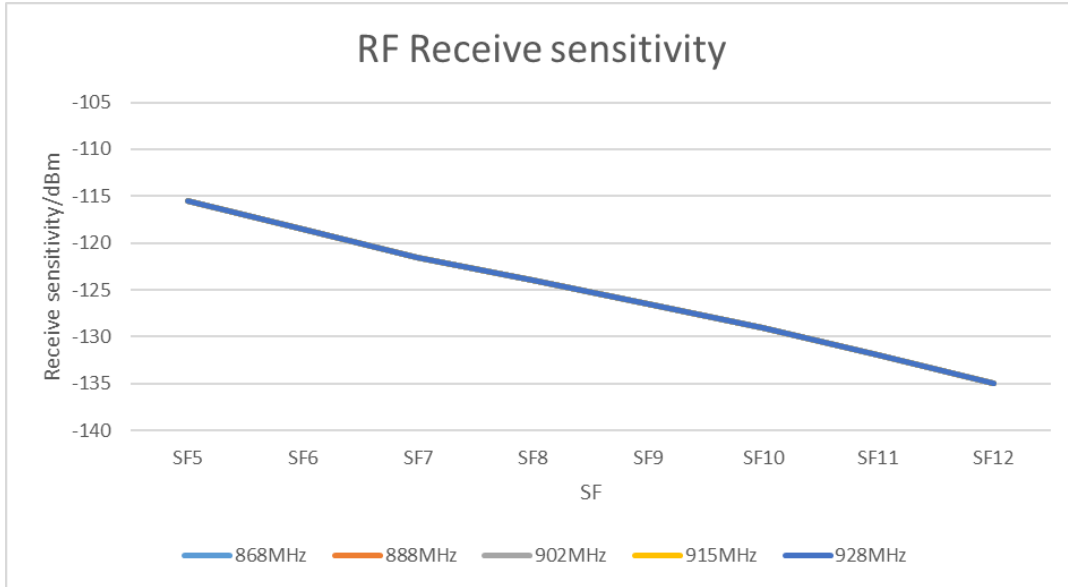


Figure 11 RF Receiver Sensitivity vs Spreading factor (868~928MHz)

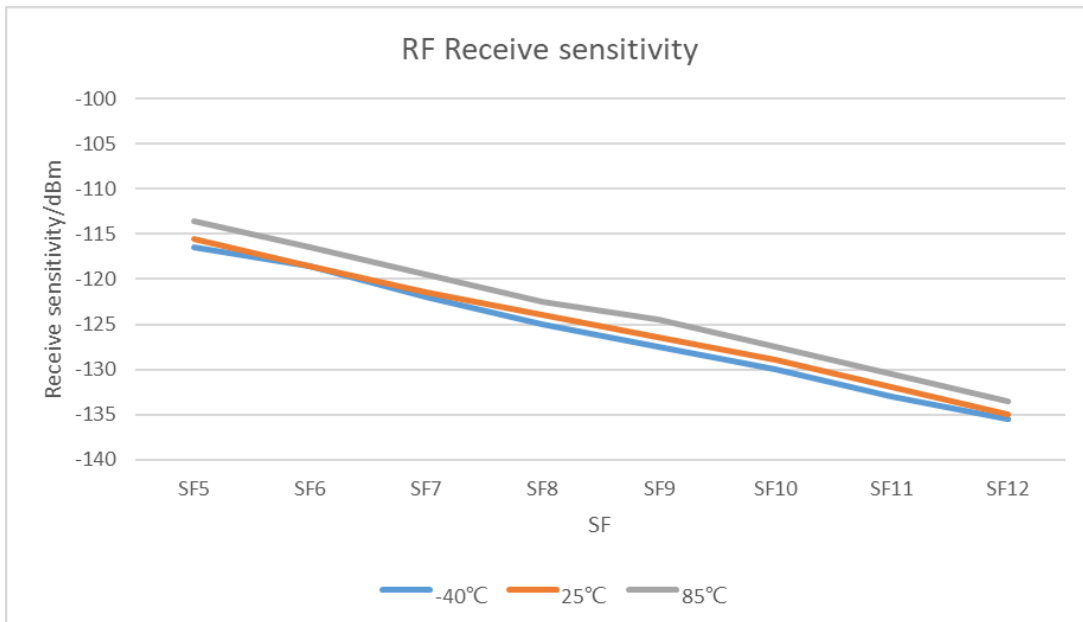


Figure 12 RF Receiver Sensitivity VS Temperature (868MHz)

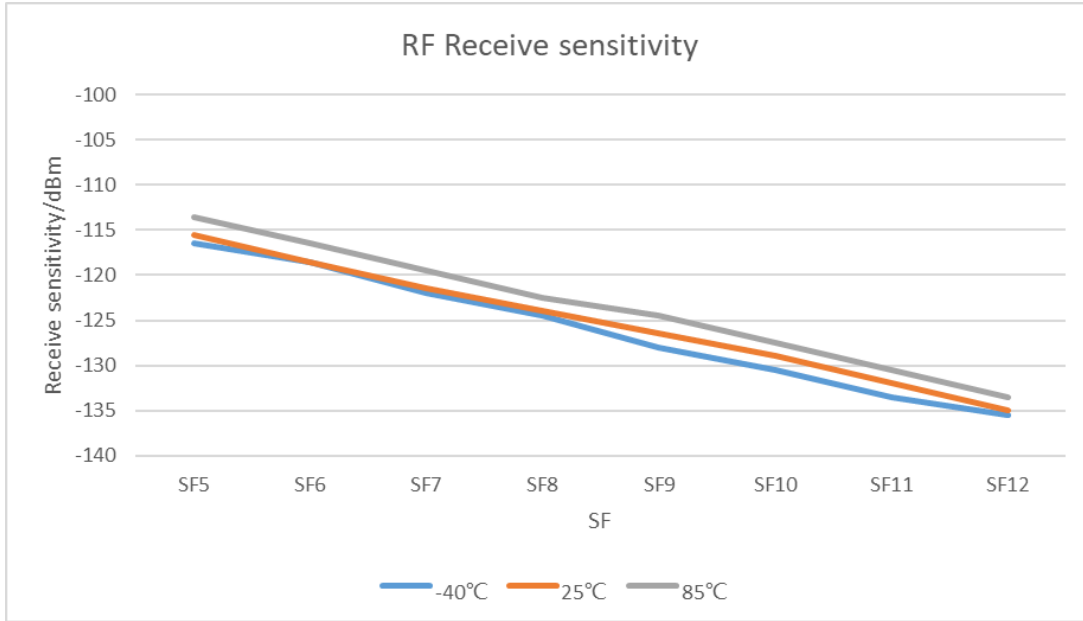


Figure 13 RF Receiver Sensitivity VS Temperature (915MHz)

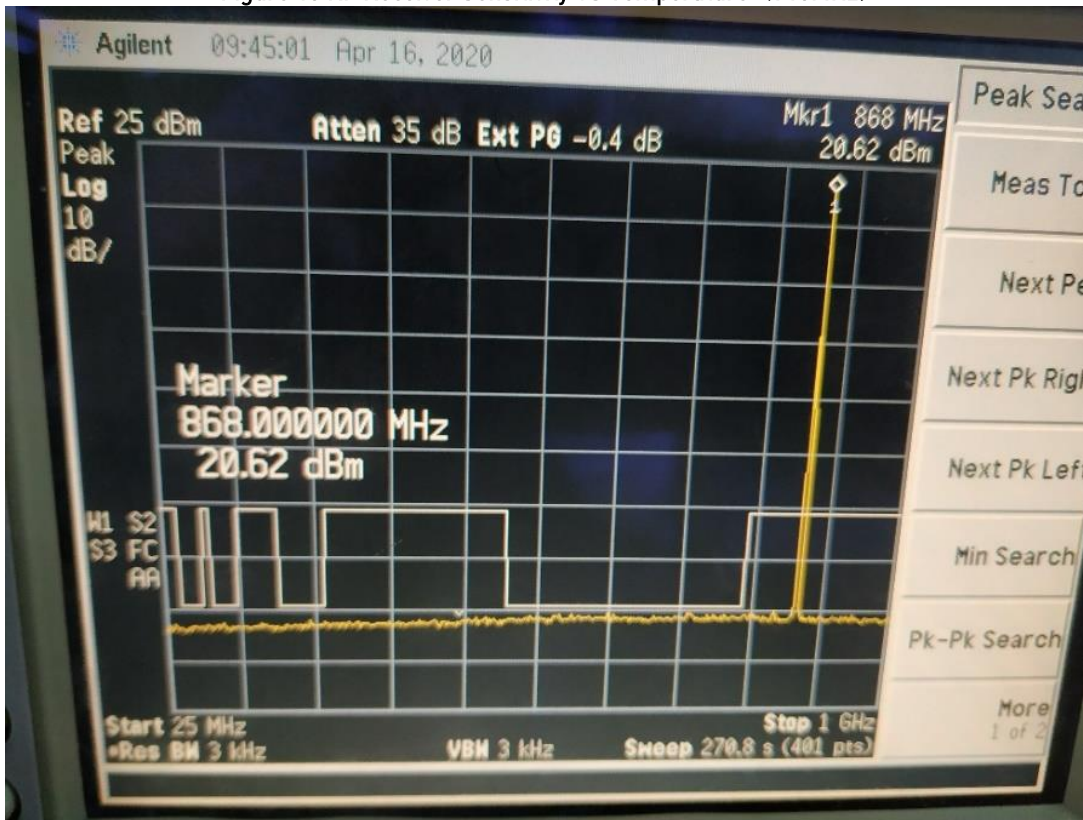


Figure 14 Harmonic(25MHz~1GHz)@Frf=868MHz, TXOP=22dBm

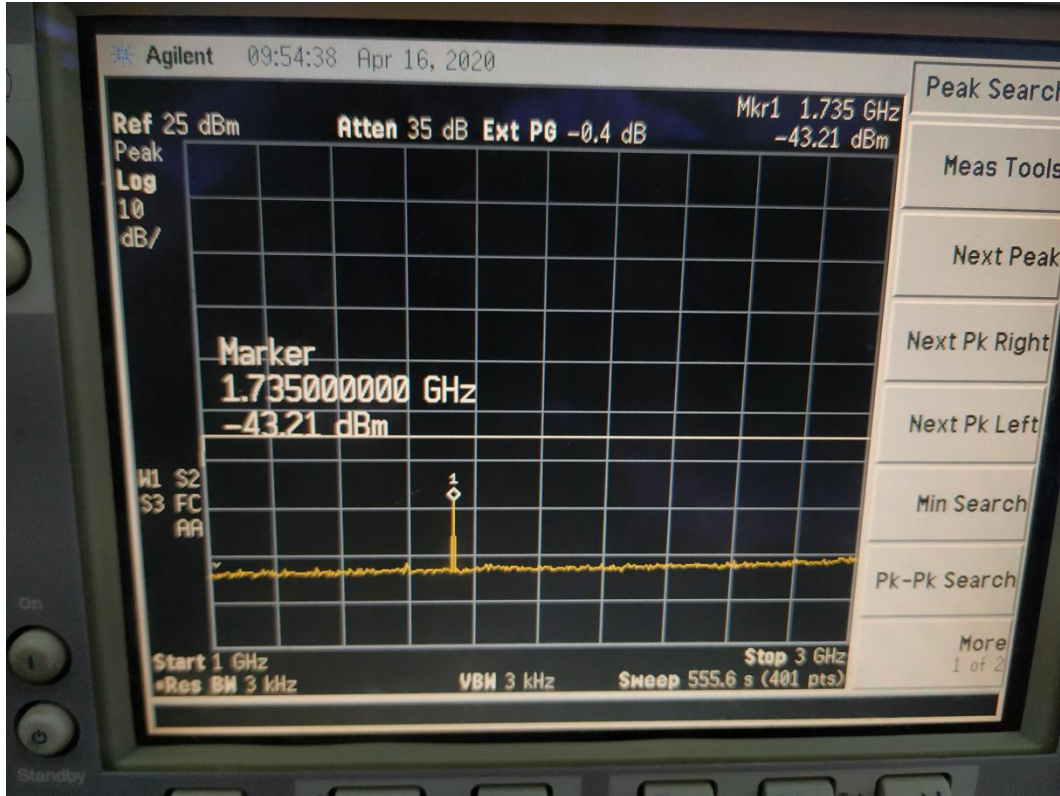


Figure 15 Harmonic(1GHz-3GHz)@Frf=868MHz, TXOP=22dBm

5 Application information

5.1 Package information

LoRa-E5 has a 28-pin SMD package:

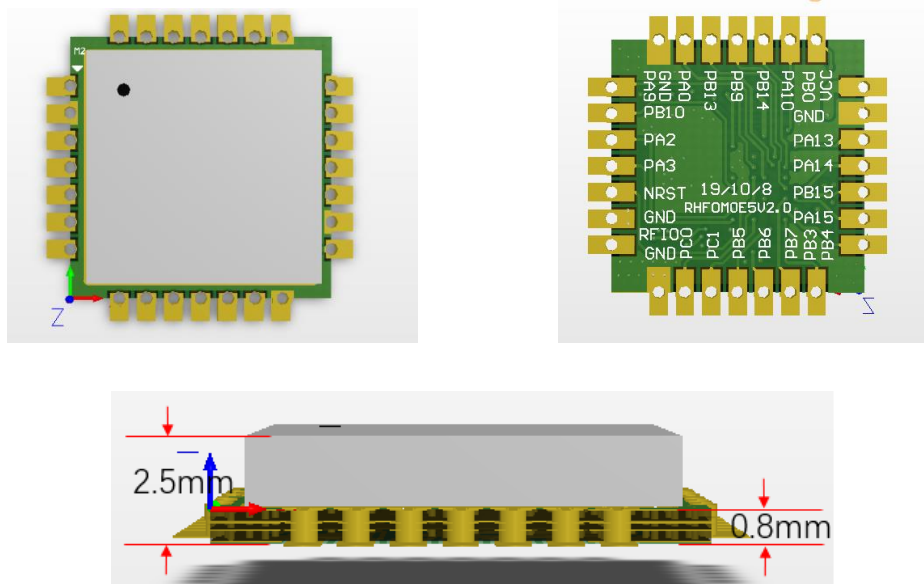


Figure 16 LoRa-E5 Module appearance

The following figure shows the recommended Layout package dimensions.

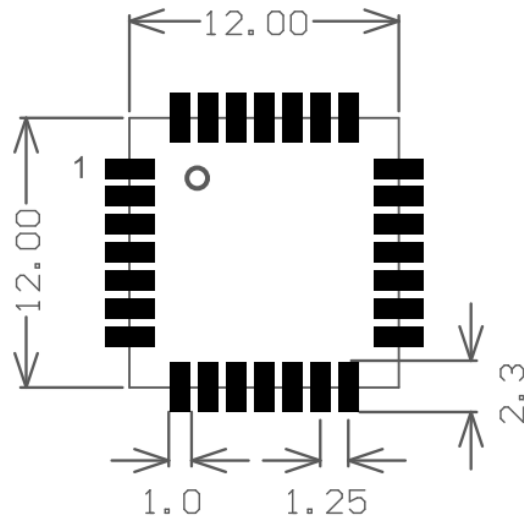


Figure 17 PCB layout

5.2 External interface of the module

In addition to several necessary GPIO ports and a set of SPI ports used for internal RF transceiver control, other GPIOs of the MCU have been derived, including UART (for AT commands), I2C, ADC, etc. For customers who want to develop software on the MCU of the module, these rich GPIO interfaces are very useful for users who need to expand peripherals.

5.3 Reference design based on LoRa-E5 module

LoRa-E5 embeds the global LoRaWAN[®] protocol and AT instruction set. This will make the design of LoRaWAN[®] nodes based on this module very easy. The following is a typical reference design that uses LoRa-E5 to quickly start a LoRaWAN[®] application. Just connect UART and NRST to the host MCU and send AT commands.

In addition, Pin24 grounding of the module will force the module to enter Boot upgrade mode.

Note: The 28-pin PB0 must be left floating and not allowed to be pulled up or grounded.

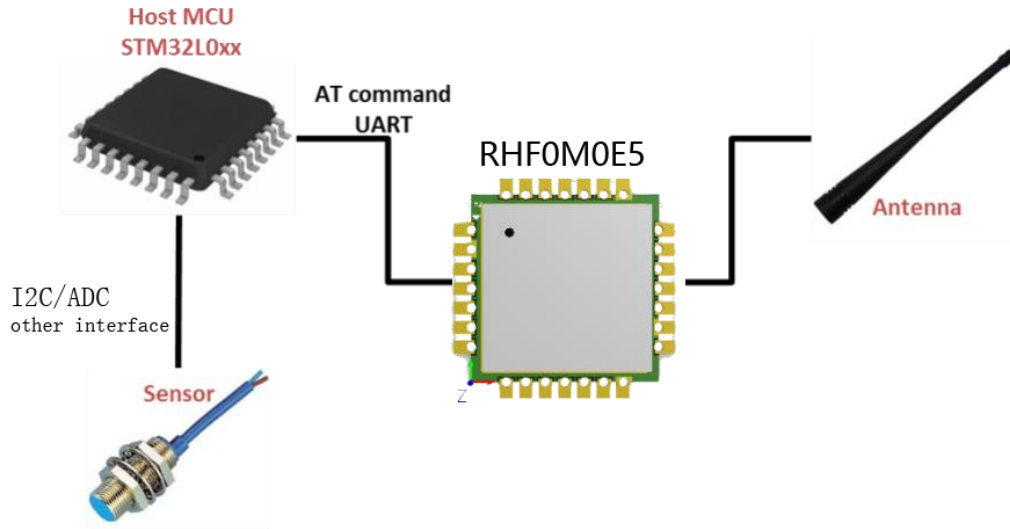


Figure 19 Design of LoRaWAN® wireless sensor based on LoRa-E5 module

7 Ordering information

Technical Support: sensecap@seeed.cc

Sales: iot@seeed.cc

Table 5 Ordering Information

Part Number	MCU	TX Power (dBm)	AT Modem
LoRa-E5-LF	ROM 256KB / RAM 64KB	10@LF(434MHz) 22@LF (470MHz)	Yes
LoRa-E5-HF	ROM 256KB / RAM 64KB	22@HF (868/915MHz)	Yes

8 Reversion

V1.0 2020-07-20 First release