
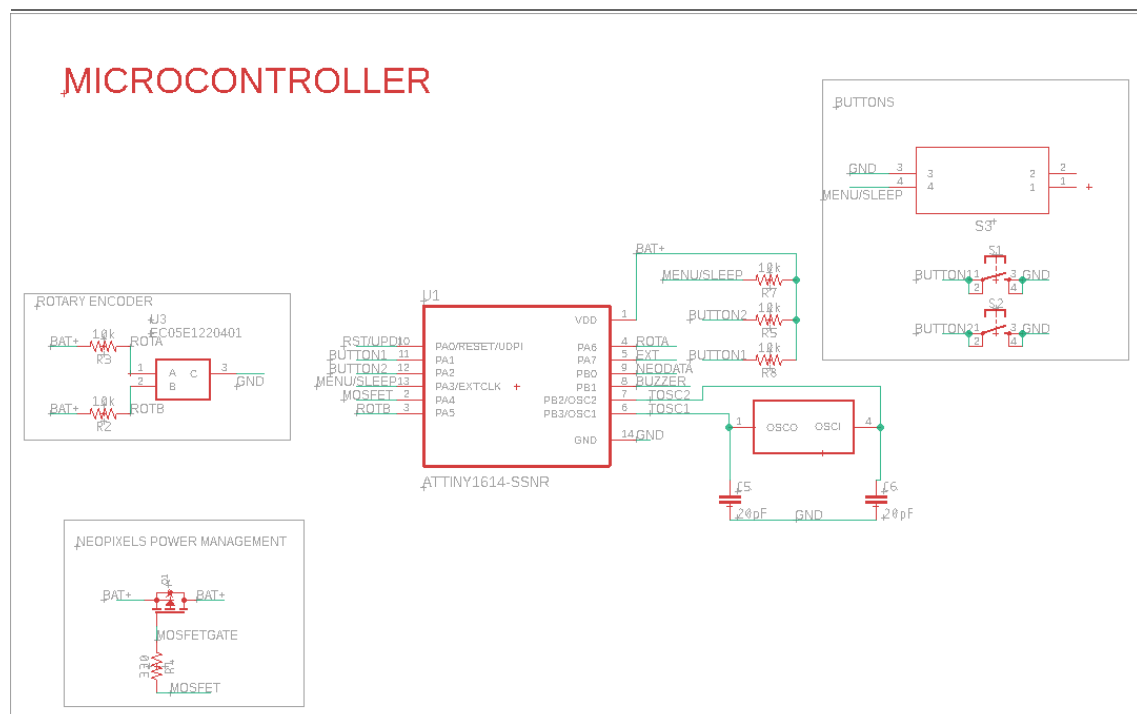


Technical specifications.

-Attiny 1614 microcontroller

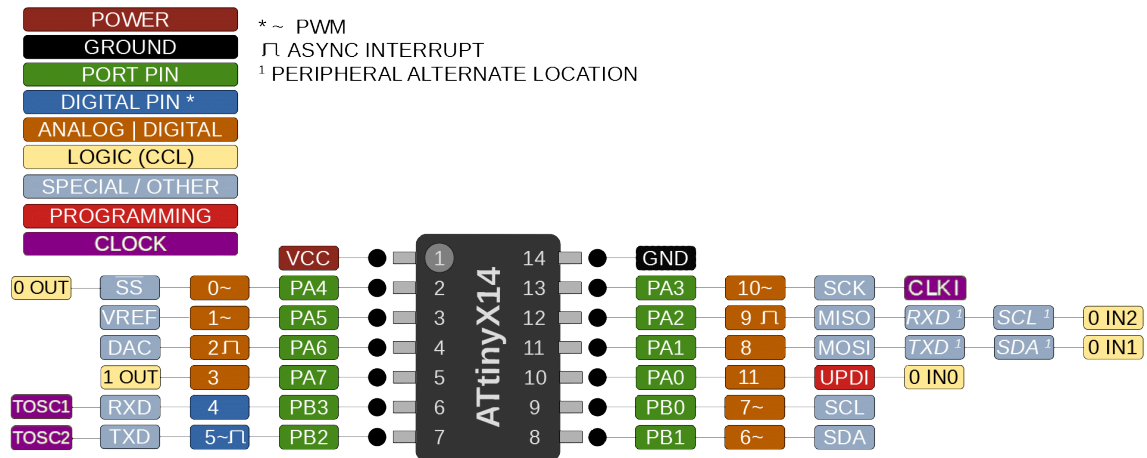

- UPDI programming interface: CH340c USB to serial adapter
- Pantalla: 10 x 10 Nano (2.4mm x 2.7mm) RGB LED 2427 (24-bit color)
- Interface: 3 buttons, 1 rotary encoder
- Battery: Lithium-ion 250mha.
- Charging: Max 1555 300mha
- Average consumption at 16 MHz: 30-130mha (depends on led brightness)
- Case: PLA+