



Namco System 10 Stereo PCB

Description

Fully assembled PCB kit. Adds RCA jacks to Namco System 10 game boards for line-level stereo audio, no soldering required. Connects to the speaker connector (J5) and mounts to existing holes using the provided hardware.

The kit includes:

- 1 x stereo PCB
- 1 x wire harness
- 4 x 6mm M3 screws
- 4 x M3 washers
- 2 x 15mm brass female-female standoffs


Compatibility

This kit is compatible with Namco System 10 boards that do not have the EXIO board. The stereo board uses the same mounting holes as the EXIO board. Some games with the EXIO already have RCA connectors included.





Installation

1. Locate the 2 mounting holes on the Namco System 10 PCB.

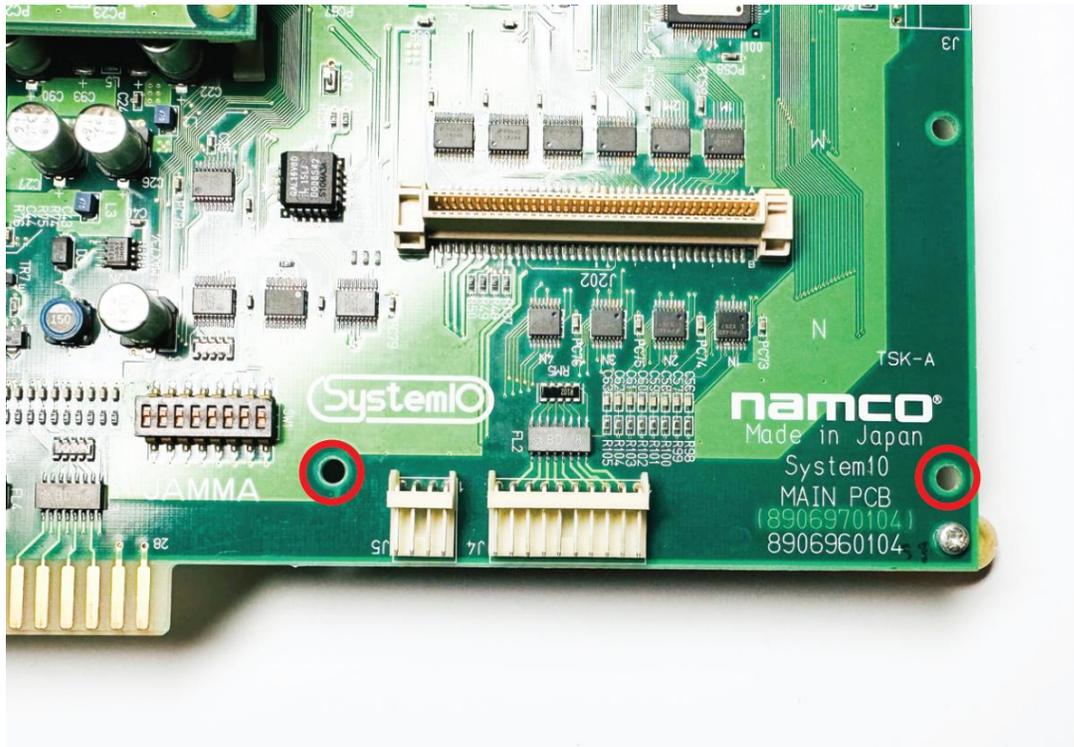


2. Place a washer on one of the screws and insert it through one of the mounting holes from the bottom of the Namco System 10 PCB. Place a second washer on the screw from the top of the PCB then screw one of the brass hex standoffs on to the screw. Repeat the same process for the other mounting hole.

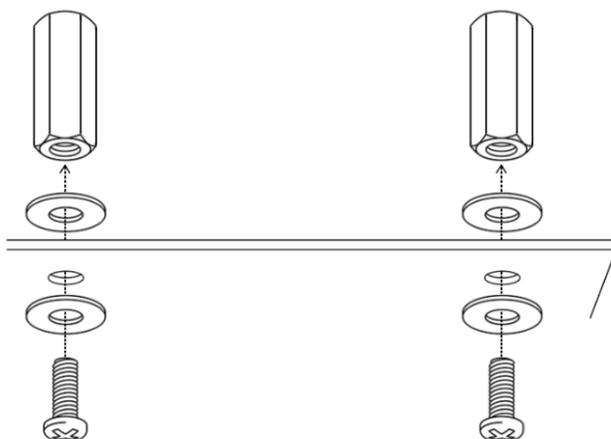


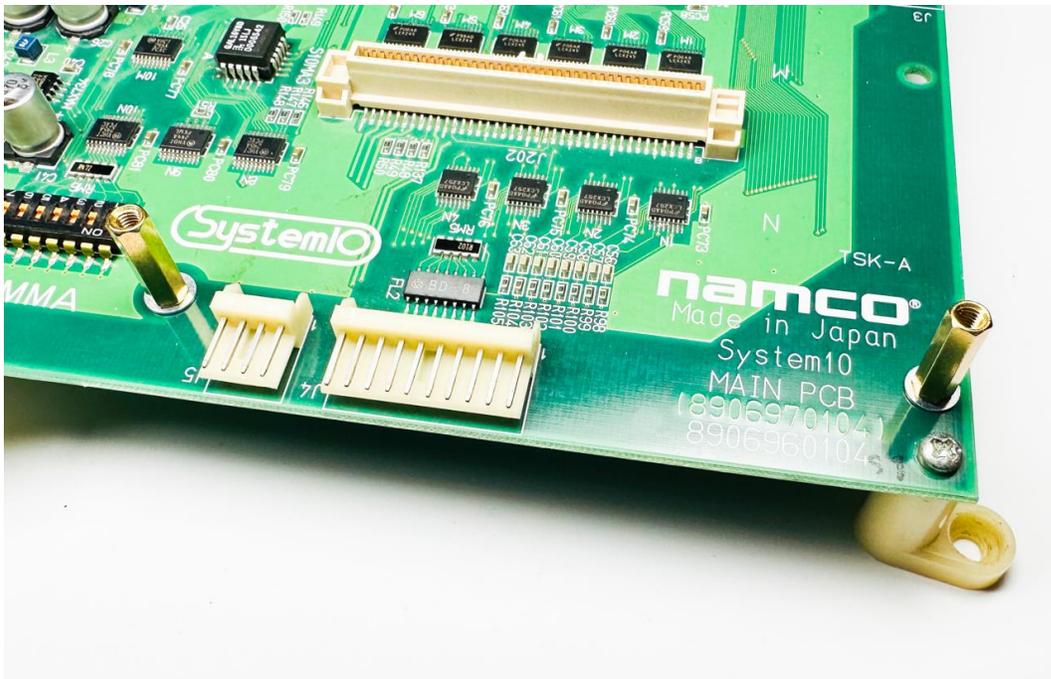

3. Using the 2 remaining screws, mount the stereo board to the brass standoffs.

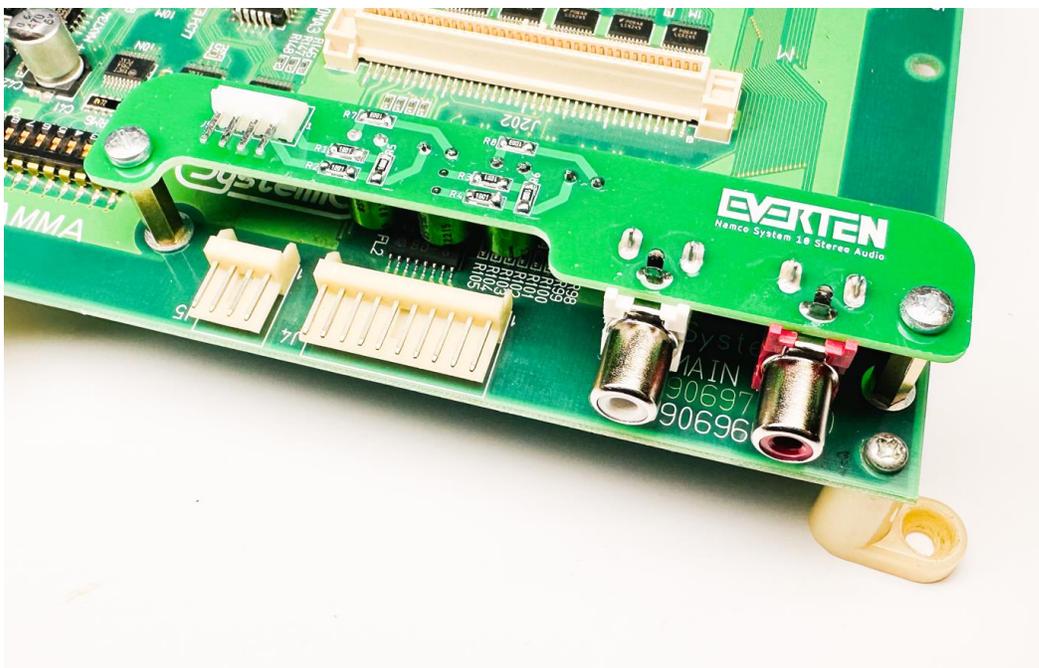

4. Connect the wire harness to the Namco System 10 PCB first, then the stereo board.

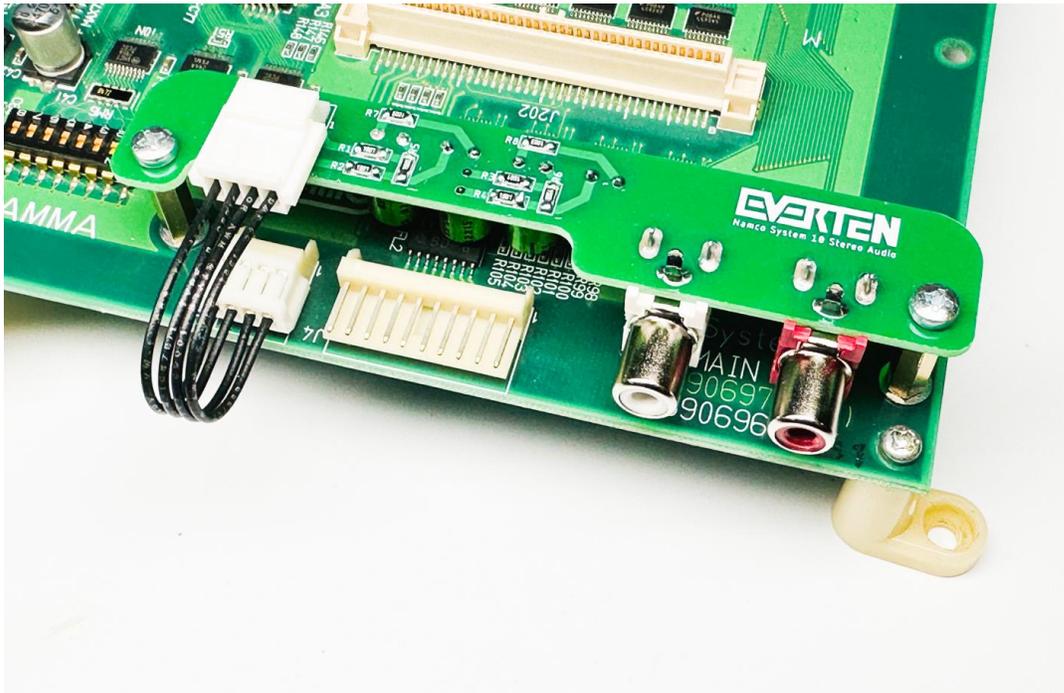

5. Adjust the Namco System 10 volume potentiometer to 50%.
6. Boot the game to the service menu and adjust the audio output to **Stereo**. Setting may vary depending on game.
7. Enjoy!