

Passive Aggressive Electronics

"Never mind, it's fine"



DAT-1

Contents:

1x DAT-1

1x Remote Control

1x AUX cable


1x Power Cable



Passive Aggressive Electronics

"Never mind, it's fine"

DAT-1

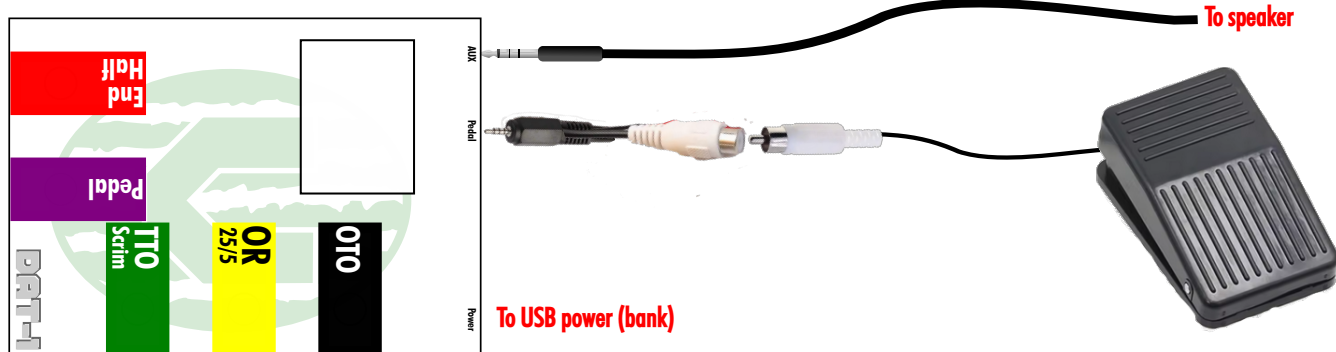

To setup DAT-1:

1. Connect the device to your speaker using the aux audio cable,
2. Using the adapter cables, plug the foot pedal into the white RCA connector and the 2.5mm connector into the DAT-1
3. Connect power connector to a USB power source such as a power bank, USB mains charger, or the USB input to your speaker. See also the "booting" notes below.

Booting:

When connecting the power to DAT-1:

1. Hold the OR button to time a speed test (aka 27/5, 25/5)
2. Hold the TTO button to time a structured scrimmage ("scrimmage mode")
3. Do not hold down any buttons for "training mode"

Speed Test:

Hold the yellow "OR" button while powering on the DAT-1. To start press the foot pedal (also available as the purple "Pedal" button). After the speed test has finished, press the pedal again to time another one.

Training Mode:

This is the default mode - simply apply power. Whenever you are ready to start a jam, press the pedal. To stop the jam, press the pedal. Rest, drink, talk and when you are ready for another jam, press the pedal.

Scrimmage Mode:

Hold the green "TTO" button while powering on the DAT-1.

To start the period and the 30 second line-up time, press the foot pedal. At any time to "go to 5", press the foot pedal during line-up time.

To start a timeout or end the period, press the relevant button **during line-up**. Timeouts (including 1 minute TTOs accidentally started) can always be ended using the pedal.

DAT-1 is designed for "informal training sessions"; as a result, the DAT-1 does NOT do the following, which should be gatekept by a human:

1. Keep count of TTOs remaining
2. Keep period time
3. Keep count of ORs

Remote Control:

The DAT-1 may come with an optional "remote control" unit with 4 buttons. These buttons serve the following purposes:

- A. Pedal
- B. Official Timeout
- C. Team Timeout
- D. End of period.



Contact Us

We can be reached at vector-whistle@moremobileprivacy.org