


SES-EV-2k Manual

Features

- Marine environmental sensor
- Seamless integration with standard NMEA2000 PGNs
- Easily configure the sensor for measurement location
- Low power consumption
- Best in class accuracy:
 - Temperature: $\pm 0.2^{\circ}C$
 - Relative humidity: $\pm 1.8\%RH$
 - Barometric pressure: $\pm 0.1hPa$

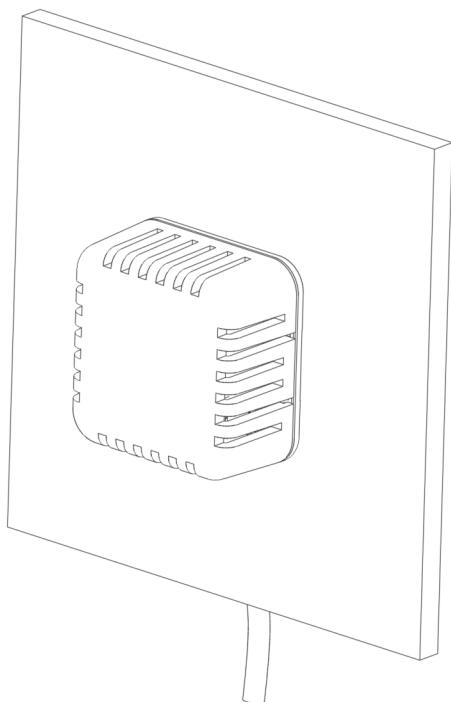

Applications

- Indoor cabin environment monitoring
- Monitor individual spaces with multiple sensors

General Description

The SES-EV-2k is a high accuracy marine environmental sensor designed to directly be connected to a NMEA2000 system. SES-EV-2k offers a sleek design with no cables or screws visible, easy to install with an integrated 2 m NMEA2000 drop cable.

Multiple SES-EV-2k sensors can operate simultaneously on the same network. Each sensor can be individually configured via its USB-C port, allowing it to report temperature measurements from different locations onboard the vessel.

Specifications

All specifications are in $0^{\circ}C \leq T_A \leq 65^{\circ}C$ unless otherwise noted.

Parameter	Specification	Unit	Comment
Voltage	12V (Max 16V)	VDC	NMEA2000 bus power
Current	4 ⁽¹⁾	mA	
Operating temperature	-30-85	°C	Maximum
Temperature accuracy	±0.2	°C	
Relative humidity accuracy	±1.8	%RH	
Relative humidity range	0 – 100	%	
Barometric pressure accuracy	±0.1	hPa	
Barometric pressure range	260-1260	hPa	
NMEA2000 PGNs	PGN130311		Environmental Parameters
	PGN130312		Temperature
	PGN130313		Humidity
	PGN130314		Actual Pressure
	PGN130316		Temperature, Extended Range
Mechanical dimensions	40x40x20	mm	Bulkhead/Panel mount ⁽²⁾
Drop cable length	2	m	M12-5 Male (Micro-C)
IP-Rating	IP30 ⁽³⁾		IP-54 available
Case material	ABS		

¹Based on characterization data, not tested in production.

²Flat wall mount option is available.

³According to IEC 60529 requirements.

Mounting

The SES-EV-2k environmental sensor is designed for panel mounting with no externally visible cables or screws. Two screws are supplied to fasten the sensor to a panel, a hole $\geq 7\text{mm}$ is required to pass the cable through the panel. The sensor consists of a back plate and a clam shell. The clam shell and circuit board have to be removed when mounting the sensor to a panel. This is done by gently pressing the two sides of the clam-shell, the circuit board is attached with three screws that must be unscrew.


A case with a cable hole can optionally be ordered if passing the cable on the other side of the panel is not wanted.

NOTE

The NMEA2000 drop cable must be disconnected before opening the sensor. Failure to do so may result in electrical damage to the product or the NMEA2000 network.

Installation recommendations

- Mount the sensor in an indoor location protected from direct water spray and mechanical impact.
- Avoid mounting near strong heat sources or areas with limited air circulation.
- Do not overtighten mounting screws, as this may damage the enclosure.

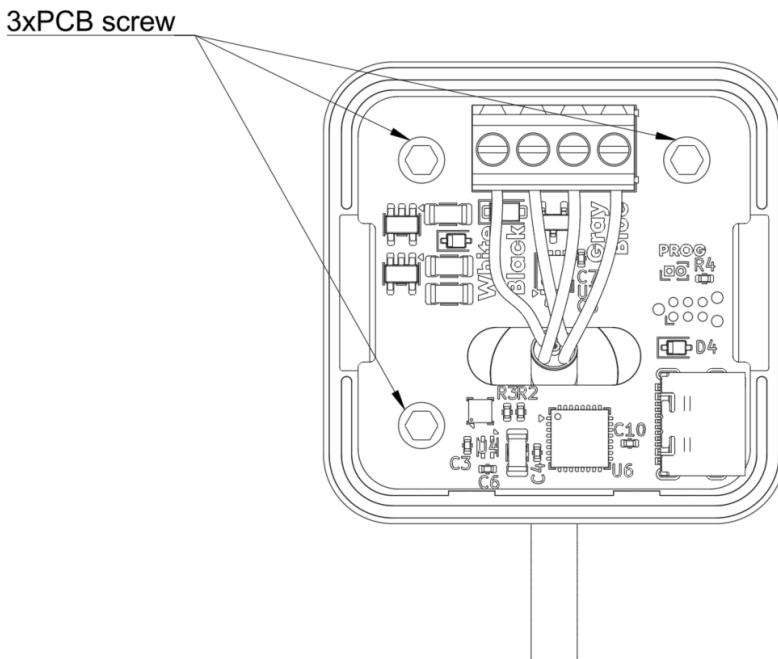


Configuration

Several operational parameters of the SES-EV-2k can be configured by the user. All configuration is performed via the device's USB-C port using the supplied configuration software. The sensor must be disconnected from the NMEA2000 network during configuration to prevent communication conflicts or unintended network behavior.


The following parameters can be configured:

- **Data source location** Specifies the physical location associated with the reported sensor data.
 - Outside temperature
 - Inside temperature (default)
 - Engine room temperature
 - Main cabin temperature
- **Data refresh rate** Defines how frequently measurement data is transmitted onto the NMEA2000 network.
 - 10 Hz
 - 1 Hz (default)
 - 0.25 Hz
 - 0.1 Hz
- **Sensor ID** Unique identifier used to distinguish multiple sensors on the same NMEA2000 network (functionality subject to firmware version).
- **Firmware update** Allows the device firmware to be updated using the configuration software.
- **Barometric pressure calibration** Enables calibration of the internal pressure sensor to improve measurement accuracy.

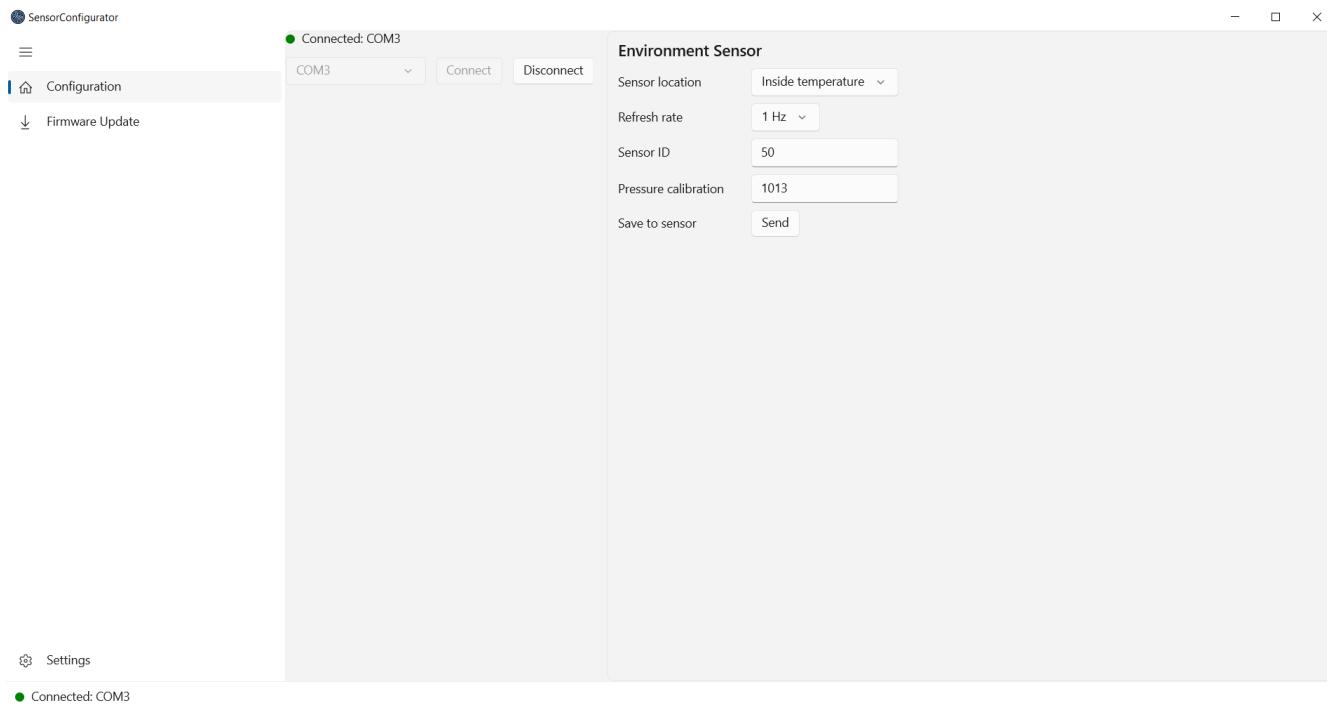

Included in package

The package contains all components required for installation and basic operation of the SES-EV-2k environmental sensor. No additional hardware is required for standard panel mounting.

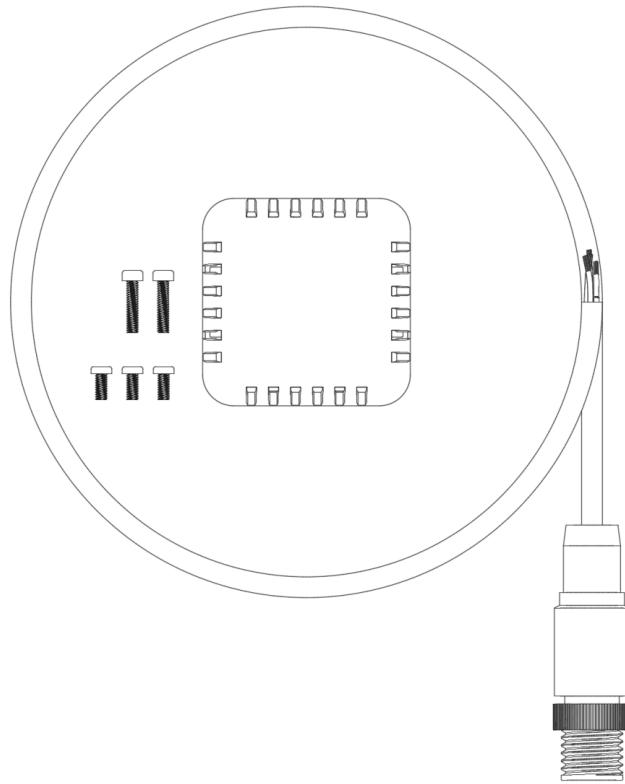

QTY	Name	Comment
1	Circuit Board Assembly	Pre-assembled PCB with electronics
1	Enclosure	Two-piece housing: back plate and clam-shell
1	NMEA2000 Drop Cable	2 m M12-5 male (Micro-C) cable
2	Mounting Screws	4×14 mm, stainless steel (AISI 316)
3	PCB Screws	2.2×5 mm, (FZB)

Table 1: Included components

Warranty

Strandnes Embedded Solutions AB warrants that the product is free from defects in materials and workmanship and will function as intended under normal use for a period of one (1) year from the date of purchase.

If a defect arises during the warranty period, Strandnes Embedded Solutions AB will, at its discretion, repair or replace the product at no cost to the customer. Any repaired or replaced product will be covered for the remainder of the original warranty period.

This warranty does not apply to damage resulting from misuse, mishandling, improper installation, unauthorized modification, or physical damage, including damage caused by exposure to conditions outside the specified environmental limits.

This warranty is provided in addition to, and does not affect, the customer's statutory rights under applicable EU consumer protection laws.

Disclaimer

This product is designed to assist navigation and environmental monitoring and must not be relied upon as the sole means for navigation. The user is responsible for the correct installation, configuration, and use of this product in accordance with the manufacturer's instructions.

Strandnes Embedded Solutions AB does not accept responsibility or liability for any damage to property, personal injury, or loss resulting from improper installation, misuse, or reliance on this product beyond its intended purpose.

Strandnes Embedded Solutions AB products may be updated or modified. As a result, the product supplied may differ in appearance, functionality, or performance from the descriptions and illustrations contained in this manual.

Revision History

Date	Version	Pages	Changes
January 2026	1	All	Initial release



Strandnes Embedded Solutions AB
Sankt Persgatan 69A
602 40, Norrköping
Sweden
info@strandnes-embedded.com